

# Wall Construction Detailing & Finishing Treatment Guide

Slab Junctions, Retaining Walls, Basements & Shafts, Junctions, Openings, Terminations, Attachments and services, Finishing Treatments

# Contents

<b>INTRODUCTION</b>	<b>3</b>
Overview	3
<b>CONSTRUCTION DETAILS</b>	<b>4</b>
<b>Slab Junctions</b>	<b>4</b>
Fig 1: Horizontal Joint with Rebated Slab Edge	4
Fig 2: Wall to Slab Junction	5
Fig 3: External Wall/Slab Junction at Typical Raft Slab Above Ground	6
Fig 4: Balcony Wall	7
Fig 5: Step Floor or Stair Landing Within a Fire Isolated Void	8
Fig 6: Junction with Post-Tensioned Slab (Internal Wall)	9
Fig 7: Balcony Dividing Wall	10
<b>Retaining Walls</b>	<b>11</b>
Fig 8: Retaining Wall or Basement Wall to Slab Junction	11
Fig 9: Cantilevered Retaining Wall (maximum height 3400mm)	12
Fig 10: Cantilevered Retaining Wall (maximum height 1800mm)	13
<b>Basements and Shafts</b>	<b>14</b>
Fig 11: Typical Basement	14
Fig 12: Typical Lift Pit	15
<b>Junctions</b>	<b>16</b>
Fig 13: Corners with Squint Angles	16
Fig 14: Corners with Timber Formwork	17
Fig 15: Movement Joint – Vertical Junction	18
Fig 16: Double Height Wall – Horizontal Joint (2 Stage Concrete Fill)	19
Fig 17: Junction of Rediwall® Party Wall and External Fire Rated Wall	20
Fig 18: Rediwall® T-Junction	21
Fig 19: Timber Floor Junction	22
Fig 20: Timber Top Plate Connection	23
<b>Openings &amp; Wall Terminations</b>	<b>24</b>
Fig 21: Door Jamb Options	24
Fig 22: End Cap Options	25
Fig 23: Typical Door Opening	26
Fig 24: Typical Wall Penetration	27
Fig 25: Typical Opening in Rediwall® - Side Elevation View	28
Fig 26: Window Opening - Side Elevation View	29
<b>Attachments &amp; Services</b>	<b>30</b>
Fig 27: Services	30
<b>Wall Systems</b>	<b>31</b>
Fig 28: Typical Party Wall Detail (Continuous Construction)	31
Fig 29: Typical Rediwall® External Wall with Internal Plasterboard Lining on Furring Channel (Continuous Construction)	32
Fig 30: Plasterboard Separating Wall (Discontinuous Construction)	33
Fig 31: Rediwall® Boundary Wall Capping (Elevation View)	34
Fig 32: Rediwall® Boundary with Different Wall Heights	34
<b>Rediwall® Finishing Treatments</b>	<b>35</b>
<b>Introduction</b>	<b>35</b>
<b>Rediwall® Non-Combustible Compliant Finishing Treatments</b>	<b>35</b>
Fig 33: Unclad Rediwall® With PVC Lining Left In Place – Finish Type (a)	36
Fig 34: Non-Combustible Cement Render (or Similar Finish) Over Rediwall® PVC Lining – Finish Type (b)	37
Fig 35: Plasterboard Direct Fixed To Rediwall® – Finish Type (c)	38
Fig 36: Plasterboard Lining and Horizontal Steel Furring Channels Fixed To Rediwall® – Finish Type (d)	39
Fig 37: Rediwall® With Face Brick Exterior Skin – Finish Type (e)	40
Fig 38: Tile System (<32kg/m <sup>2</sup> ) Mechanically Fixed To Rediwall® – Finish Type (f)	41
Fig 39: Mechanically Fixed Non-Combustible Cladding To Rediwall® – Finish Type (g)	42
Fig 40: Tile System (<32kg/m <sup>2</sup> ) Adhesive Fixed To Rediwall® – Finish Type (i)	43
Fig 41: Adhesive Fixed Non-Combustible Cladding To Unclad Rediwall® – Finish Type (h)	44

# Introduction

Volume 2 'Wall Construction Detailing & Finishing Treatments' forms part of a comprehensive afs rediwall® design guide which includes:

- Volume 1 – Design Performance and Compliance
- Volume 2 – Wall Construction Detailing & Finishing Treatments.
- Volume 3 – Installation Guide.

Downloads of these individual volumes are available via the Resource Centre at [www.afsformwork.com.au](http://www.afsformwork.com.au)

**Disclaimer:** This section of the afs rediwall® Design Guide is intended to represent good building practice in achieving structural design of rediwall®. This section is not intended in any way by AFS to represent all relevant information required on a project. It is the responsibility of those using and designing rediwall®, including but

not limited to builders, designers, consultants and engineers to ensure that the use of rediwall® complies with all the relevant National Construction Code (NCC) requirements such as, but not limited to structural adequacy, acoustic, fire resistance/combustibility, thermal, and weatherproofing provisions. All diagrams, plans and illustrations used in this section, including any reinforcement shown, are supplied for indicative and diagrammatic purposes only. It remains the responsibility of those using rediwall® to ensure that reference is made to the project engineer's structural details for all construction and reinforcement requirements.

## Overview

The architectural detailing and design of rediwall® for building projects requires the services of professional consultants, such as architects and engineers. This chapter has been prepared to assist consultants in project documentation and outlines a range of typical details.


Whilst examples of previously successful details are included throughout this chapter it does not replace the services of professional consultants nor is to be relied upon as a complete library of details as site conditions can vary from project to project.

### Note:

Except as noted on the following details, materials and work required are not provided by AFS or the rediwall® installation contractor.

This volume should be read in conjunction with Volume 1. Reference should be made to engineer's documentation for design details.

All details in this chapter are diagrammatic only and not drawn to scale.

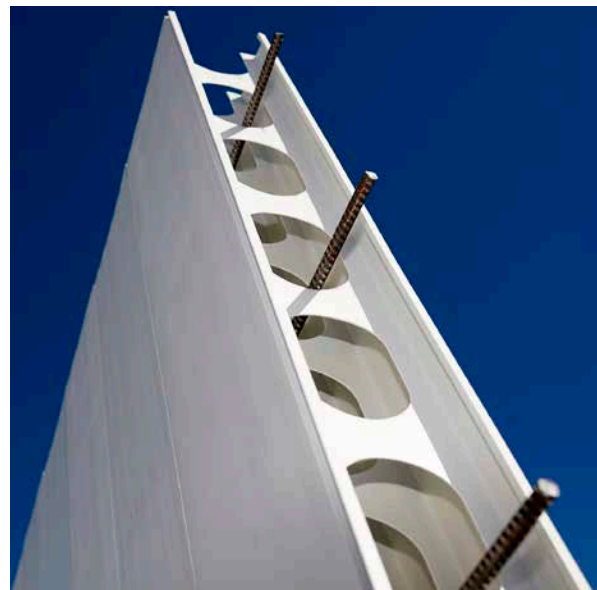


# Construction Details

Refer to Fire and Acoustic section for details on alternative finishing treatments.

The following diagrams are schematic and not necessarily to scale. They are intended to provide generic information.


## Slab Junctions

**Fig 1: Horizontal Joint with Rebated Slab Edge**

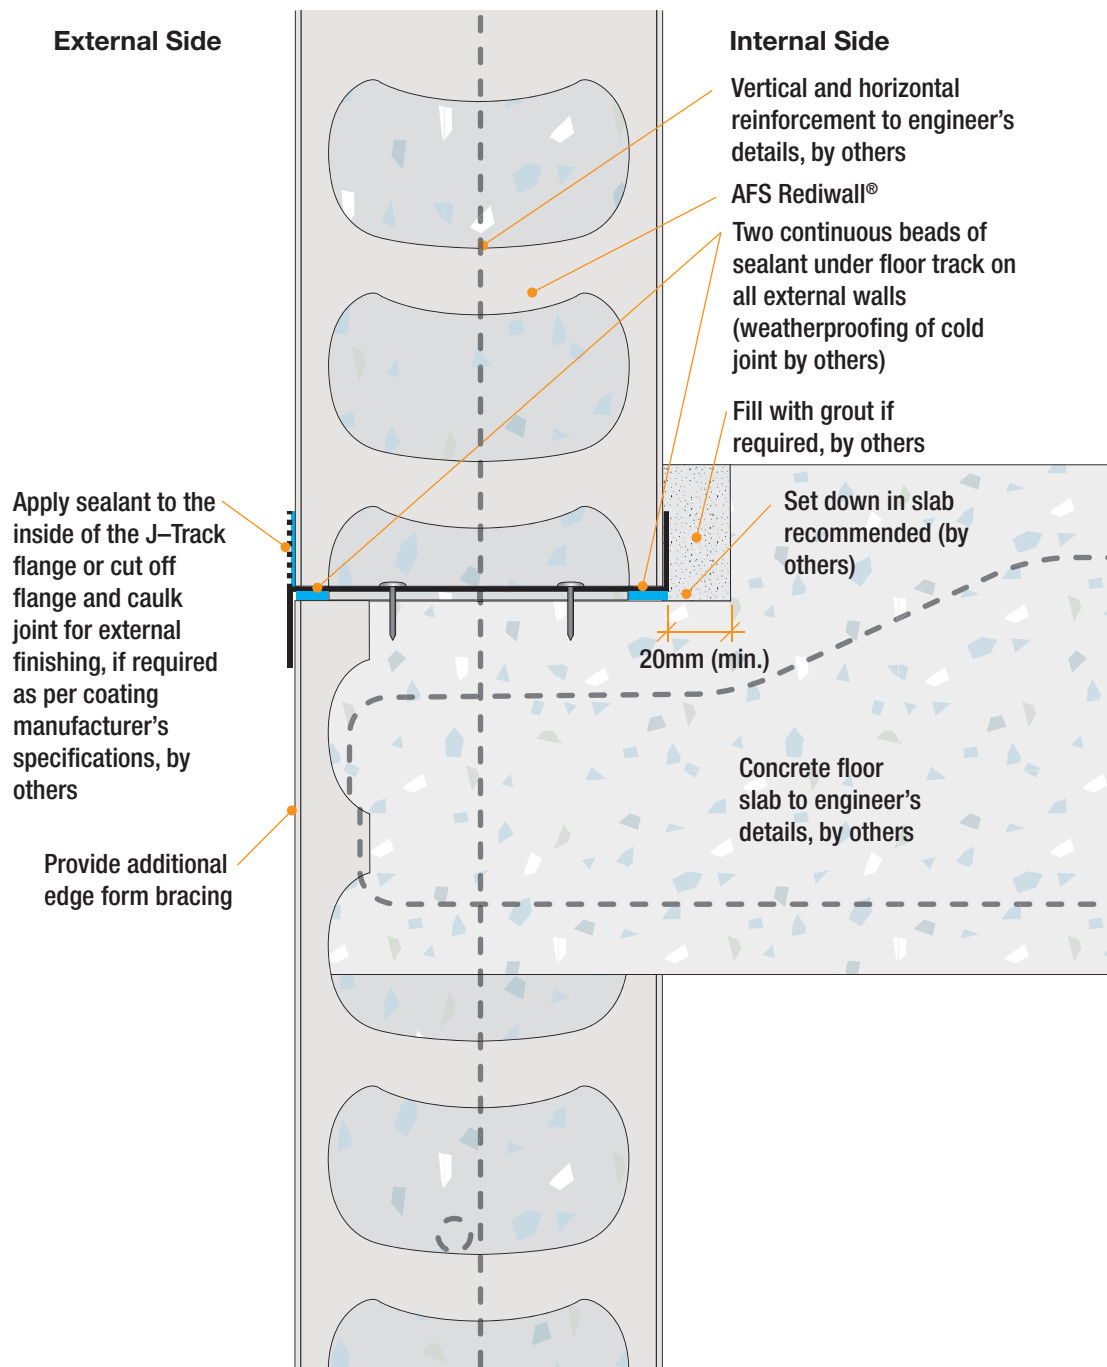

Note: Refer to "Volume 3 Installation Guide" for bracing details

**Fig 2: Wall to Slab Junction**

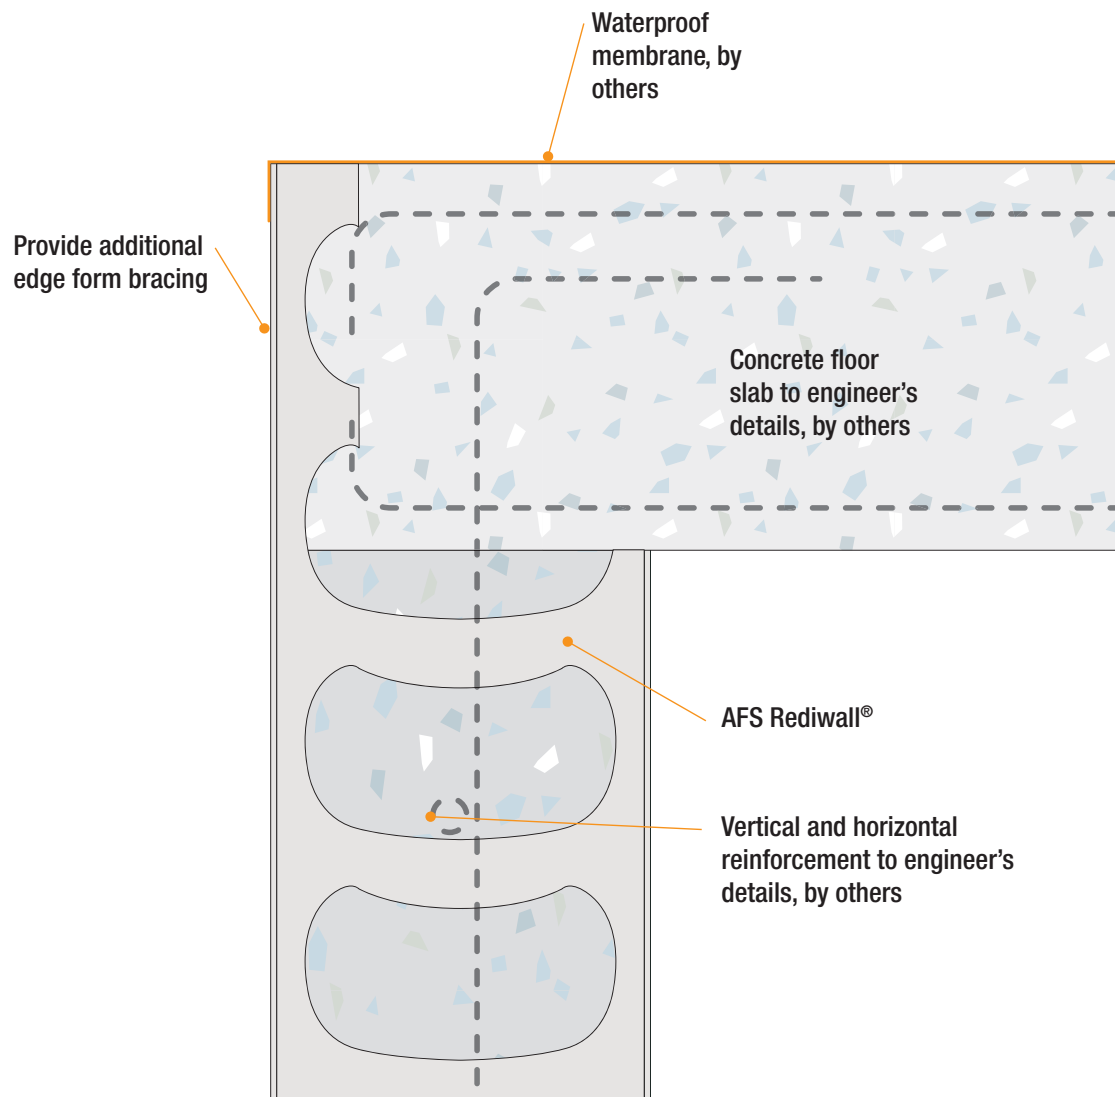

Note: Refer to "Volume 3 Installation Guide" for bracing details

Fig 3: External Wall/Slab Junction at Typical Raft Slab Above Ground

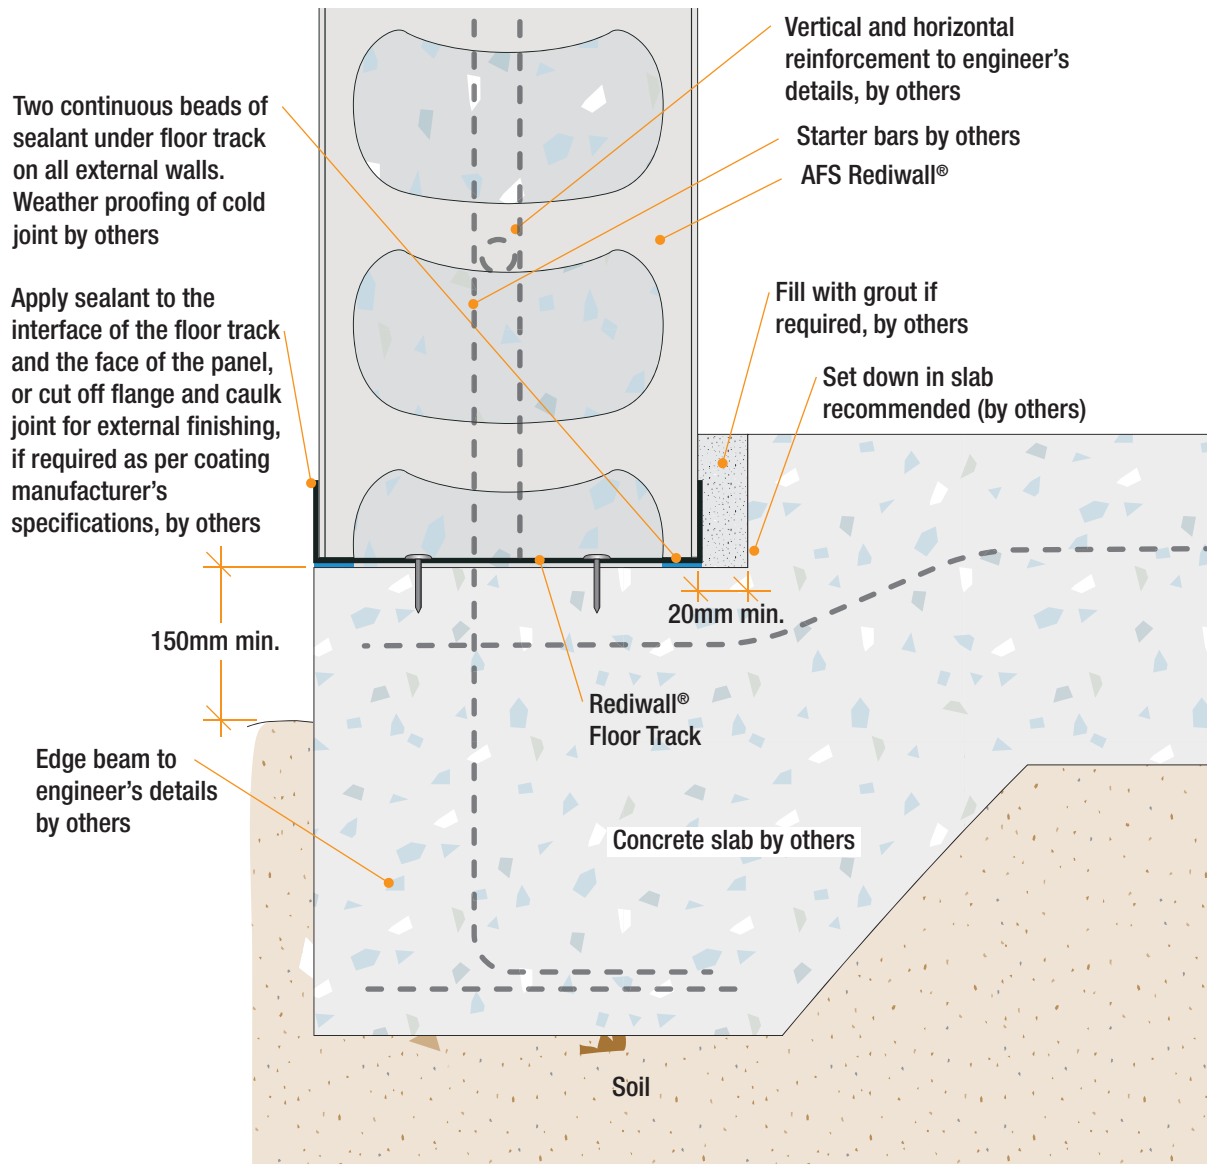
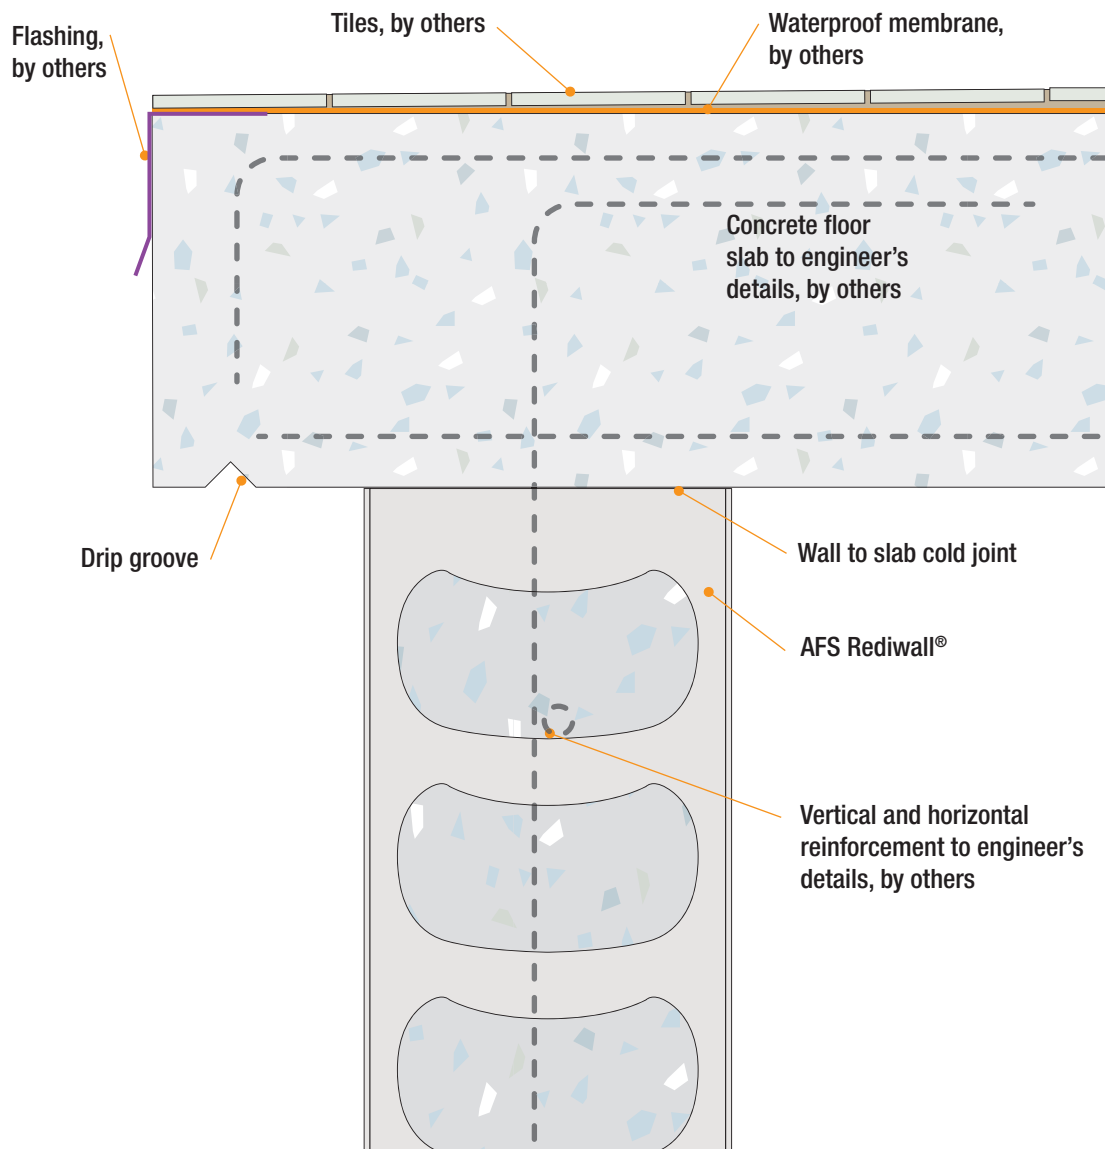
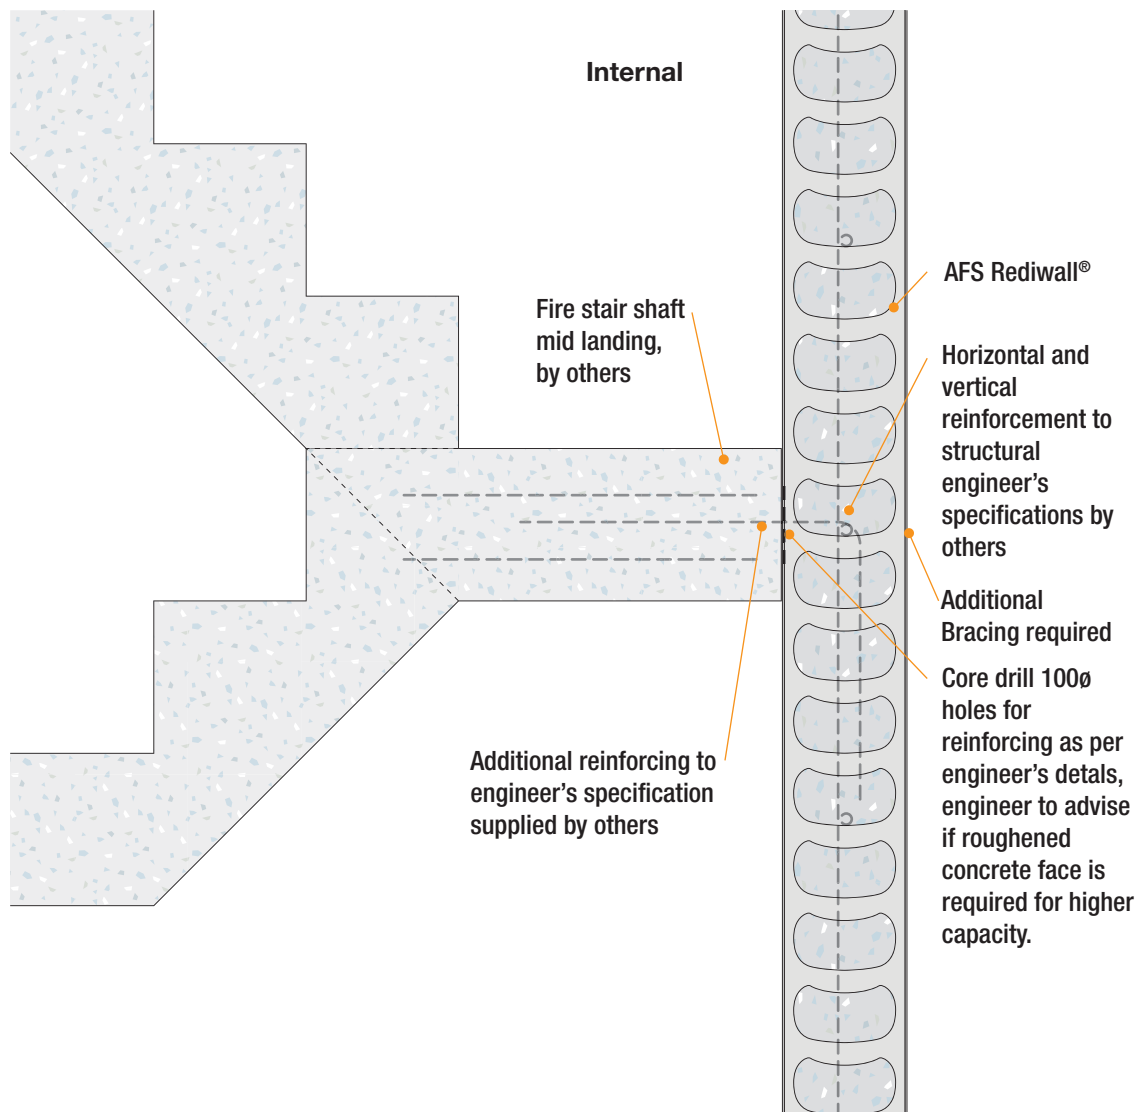


Fig 4: Balcony Wall



**Fig 5: Step Floor or Stair Landing Within a Fire Isolated Void**



**Fig 6: Junction with Post-Tensioned Slab (Internal Wall)**


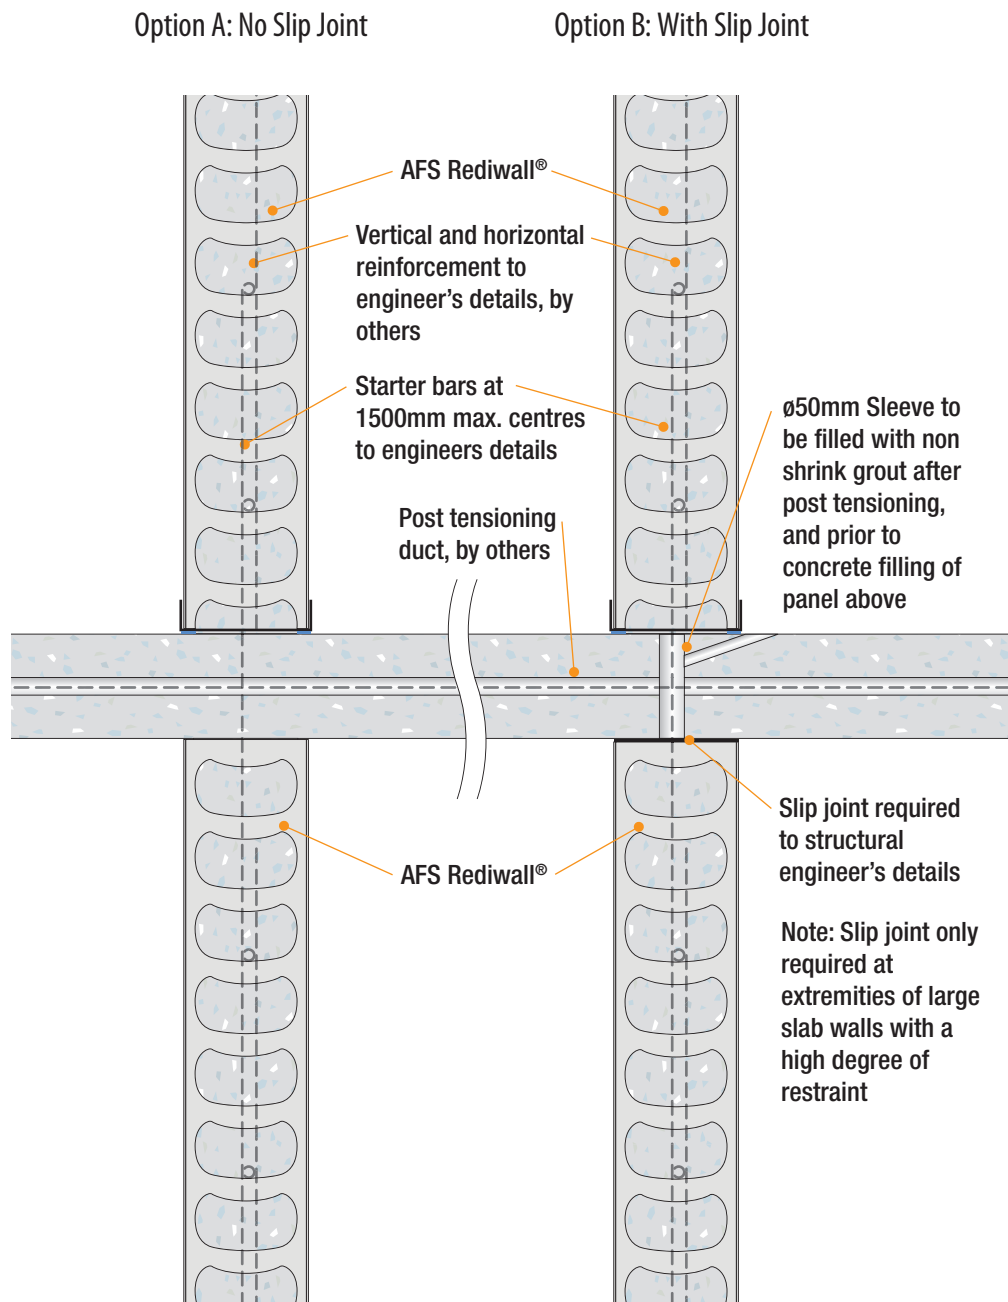


Fig 7: Balcony Dividing Wall

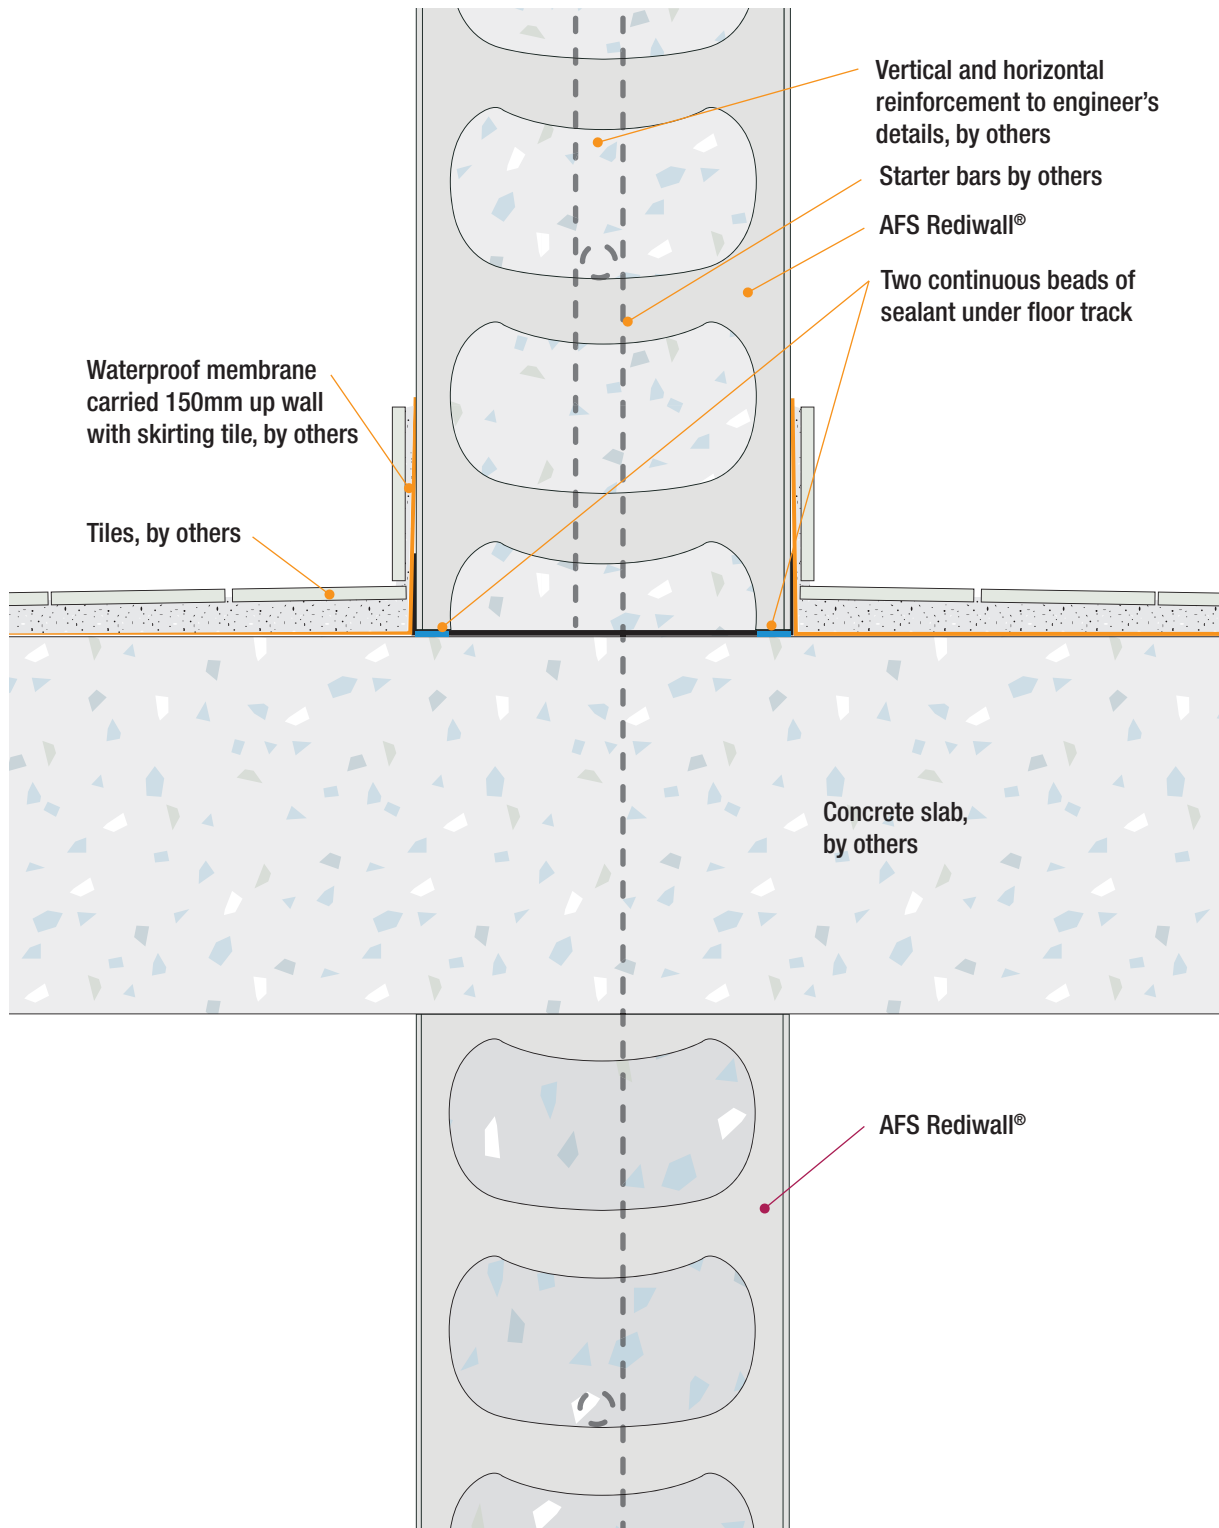

## Retaining Walls

Fig 8: Retaining Wall or Basement Wall to Slab Junction



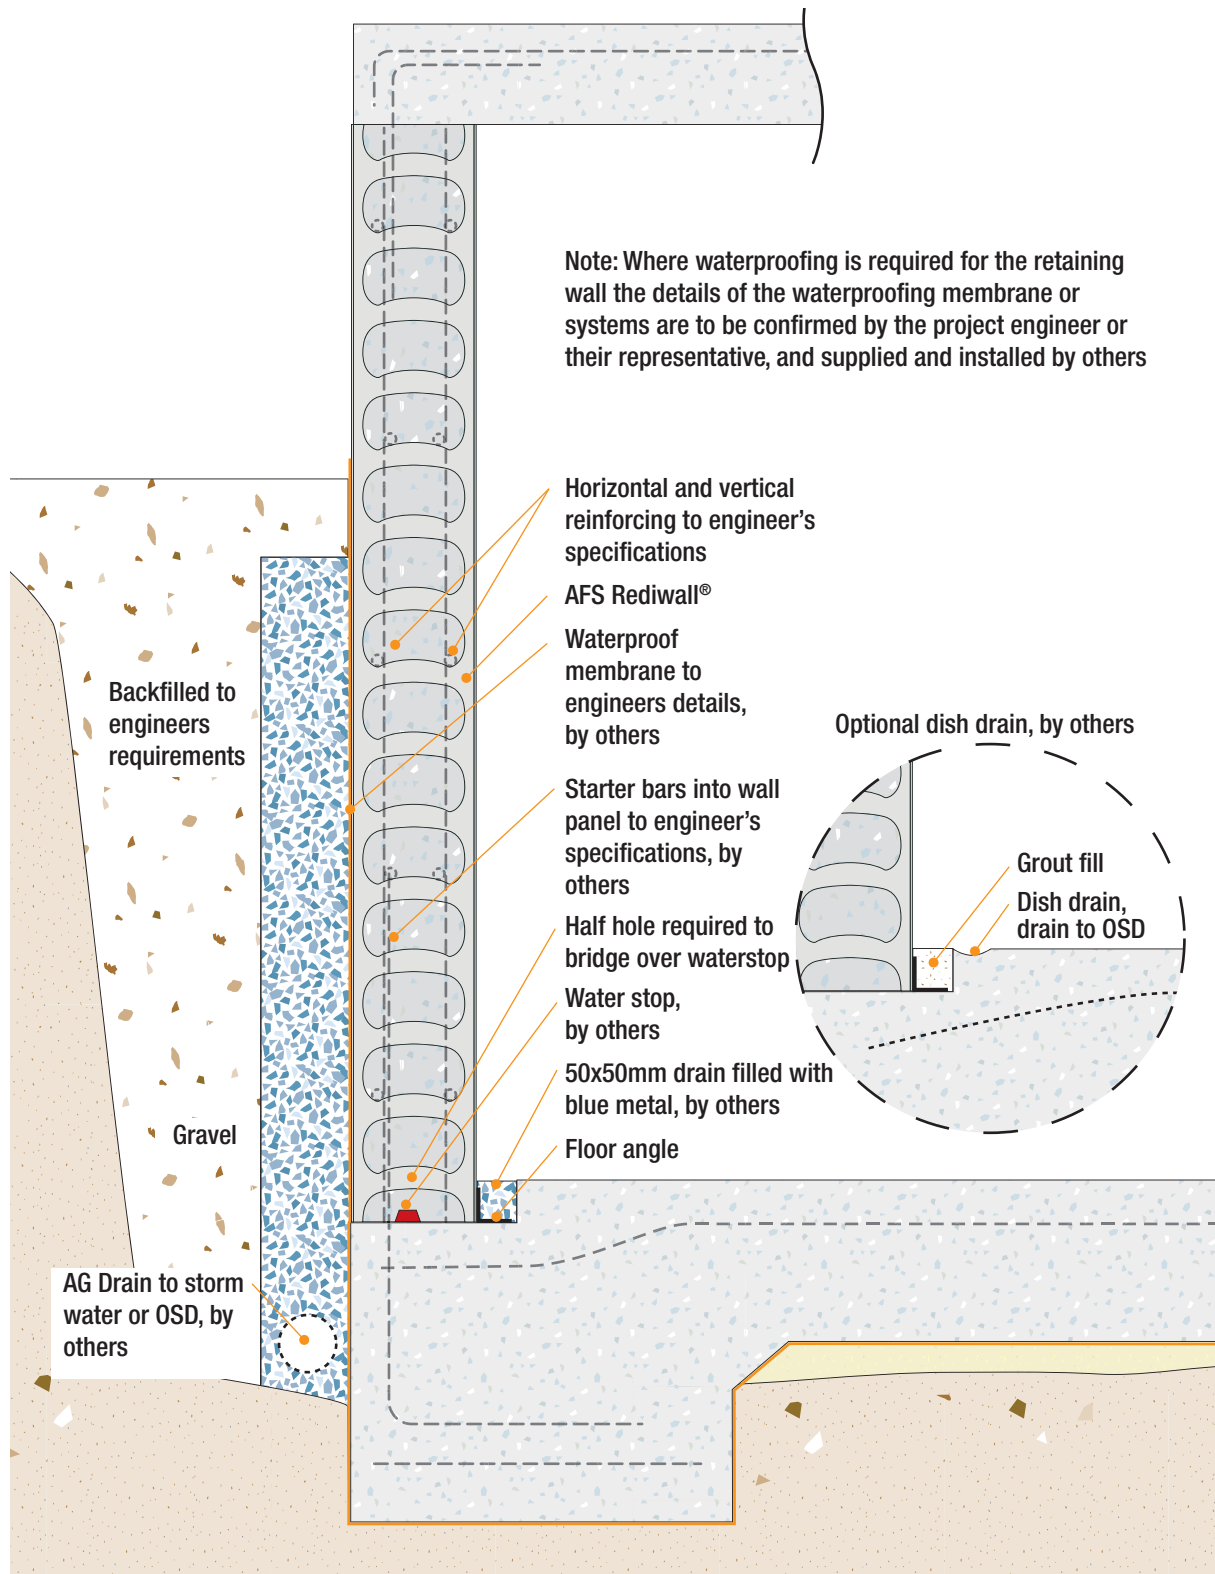


Fig 9: Cantilevered Retaining Wall (maximum height 3400mm)



**Fig 10: Cantilevered Retaining Wall (maximum height 1800mm)**

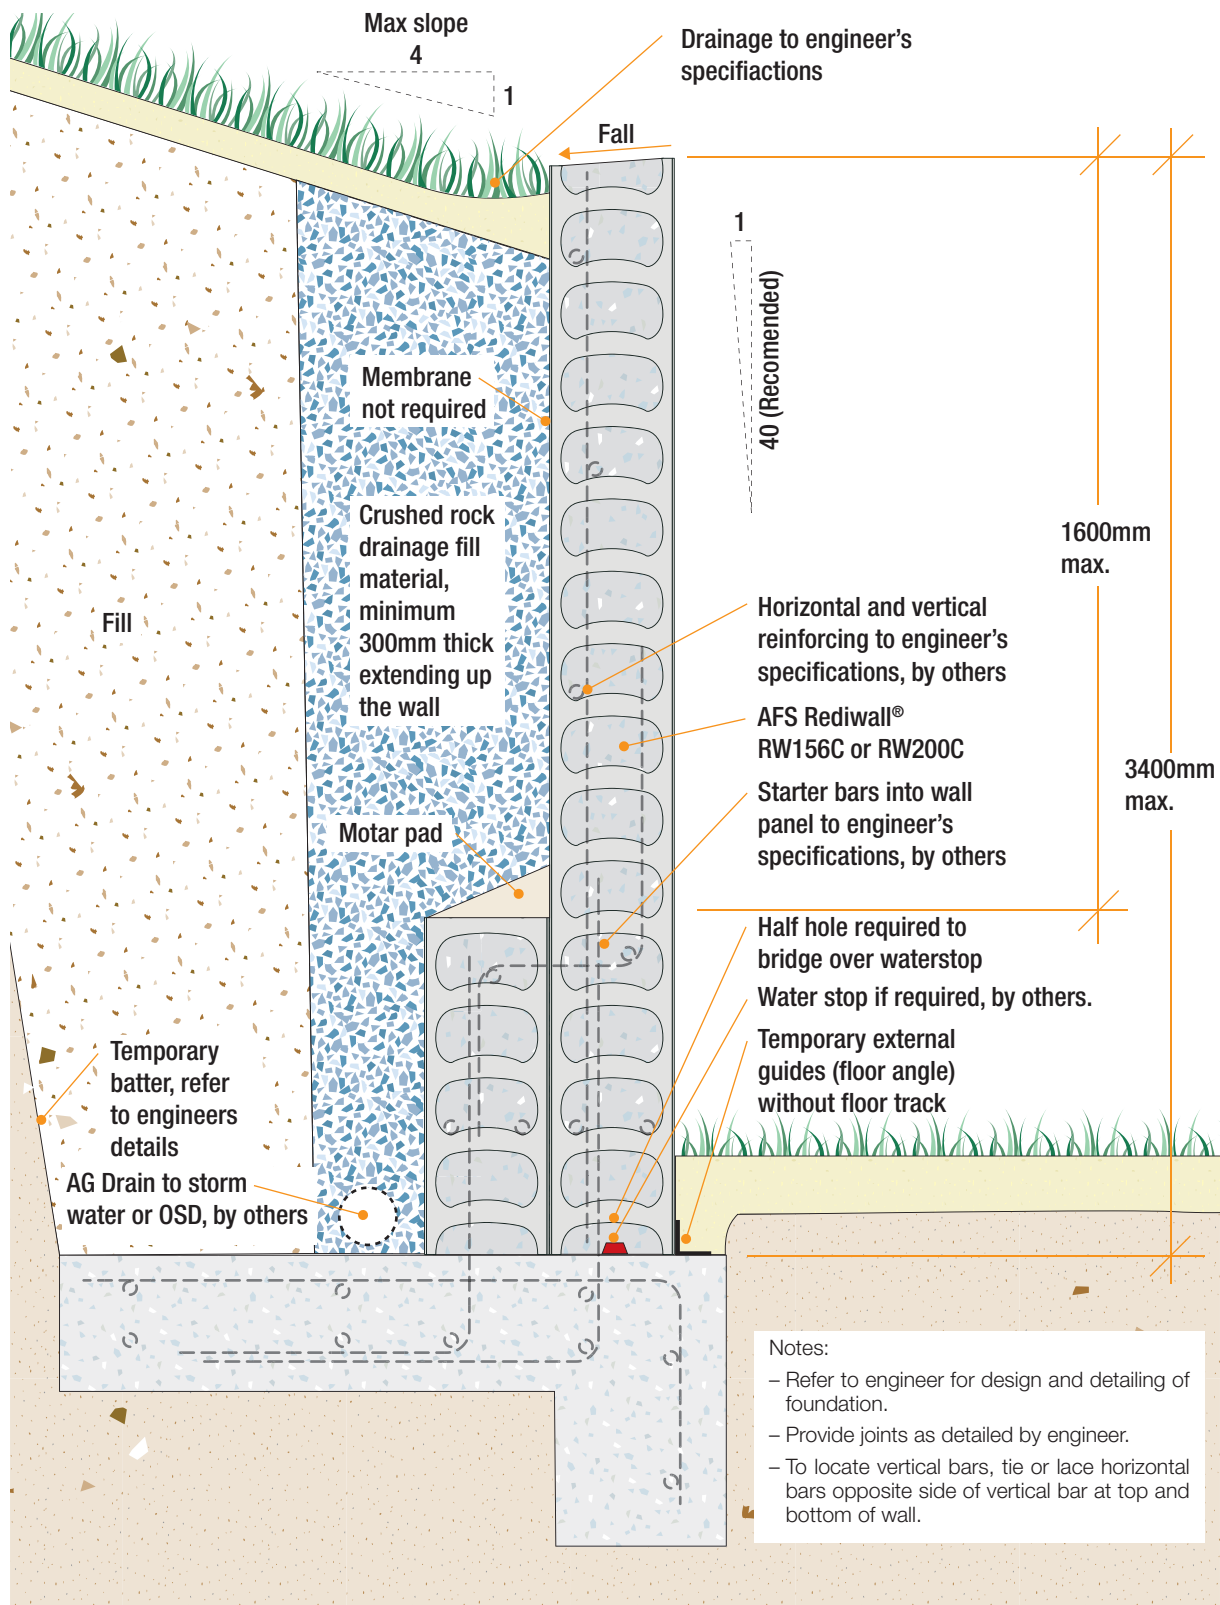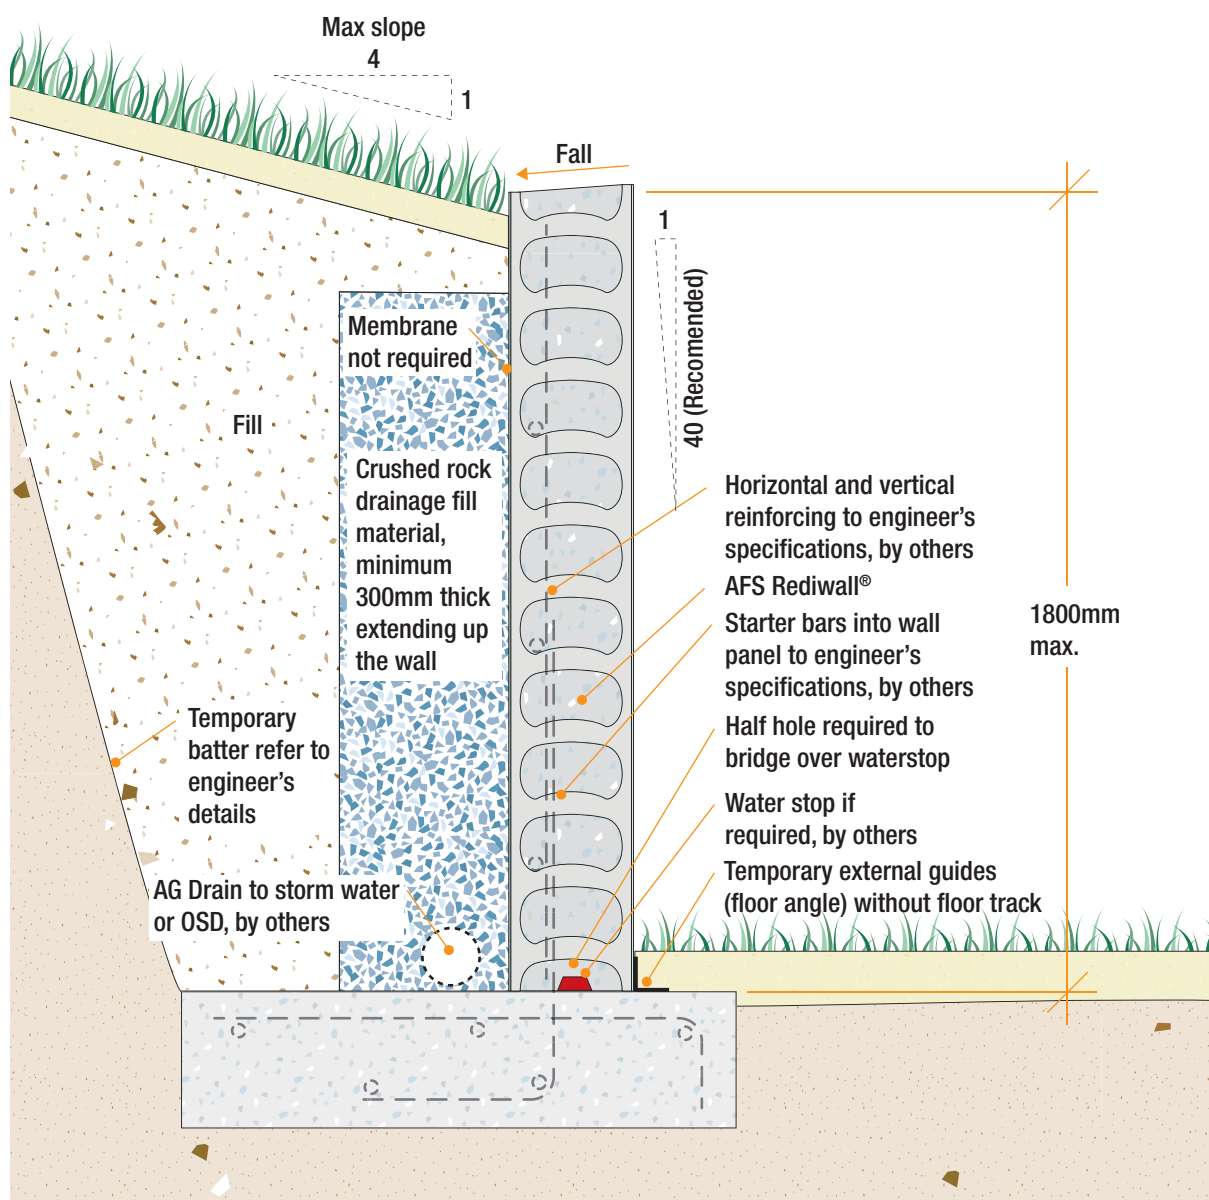


Notes:

- Refer to engineer for design and detailing of foundation.
- Provide joints as detailed by engineer.
- To locate vertical bars, tie or lace horizontal bars opposite side of vertical bar at top and bottom of wall.

## Basements and Shafts


Fig 11: Typical Basement

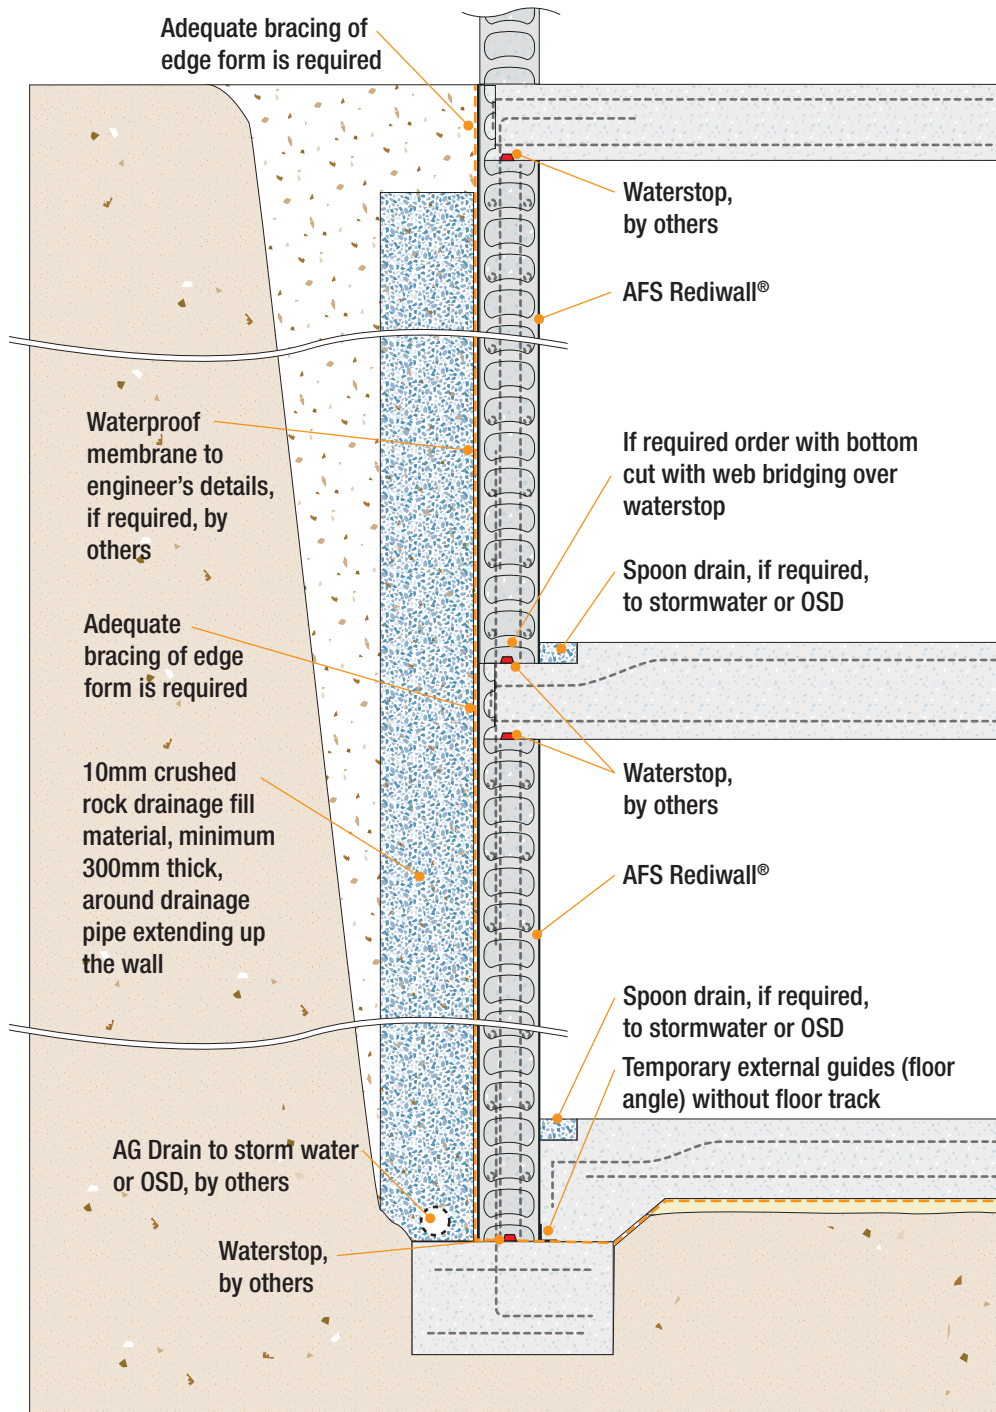

**Notes:**

- Where waterproofing is required for the retaining wall the details of the waterproofing membrane or systems are to be confirmed by the project engineer or their representative, and supplied and installed by others.
- Refer to engineer for design and detailing of foundation.
- Provide joints as detailed by engineer.
- To locate vertical bars, tie or lace horizontal bars opposite side of vertical bar at top and bottom of wall.
- Refer to "Volume 3 Installation guide" for bracing details.

Fig 12: Typical Lift Pit

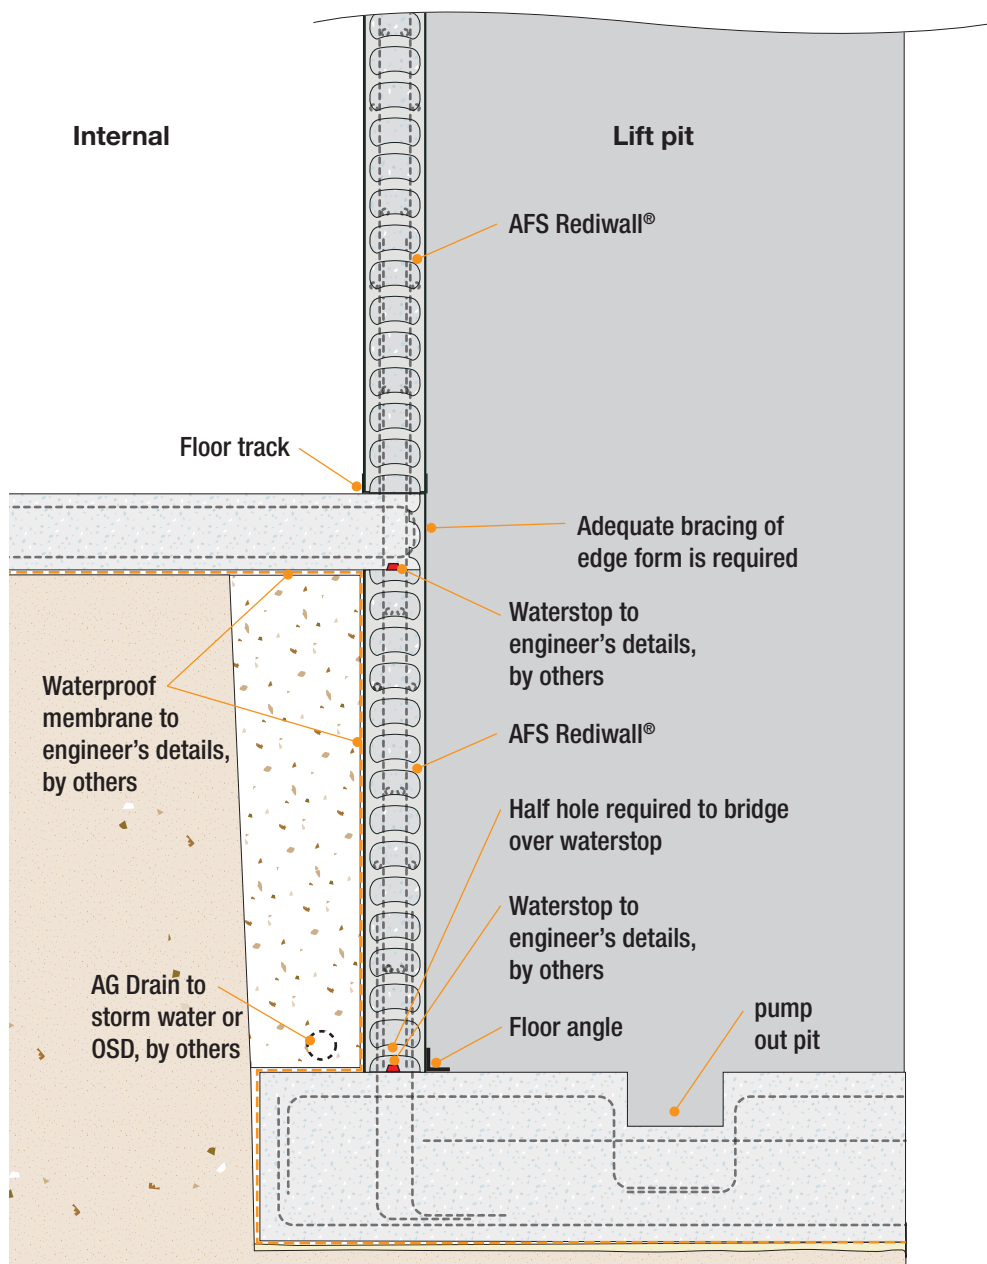


## Notes:

- Where waterproofing is required for the retaining wall the details of the waterproofing membrane or systems are to be confirmed by the project engineer or their representative, and supplied and installed by others.
- Refer to engineer for design and detailing of foundation.
- Provide joints as detailed by engineer.
- To locate vertical bars, tie or lace horizontal bars opposite side of vertical bar at top and bottom of wall.
- Refer to "Volume 3 Installation guide" for bracing details.

## Junctions


Fig 13: Corners with Squint Angles

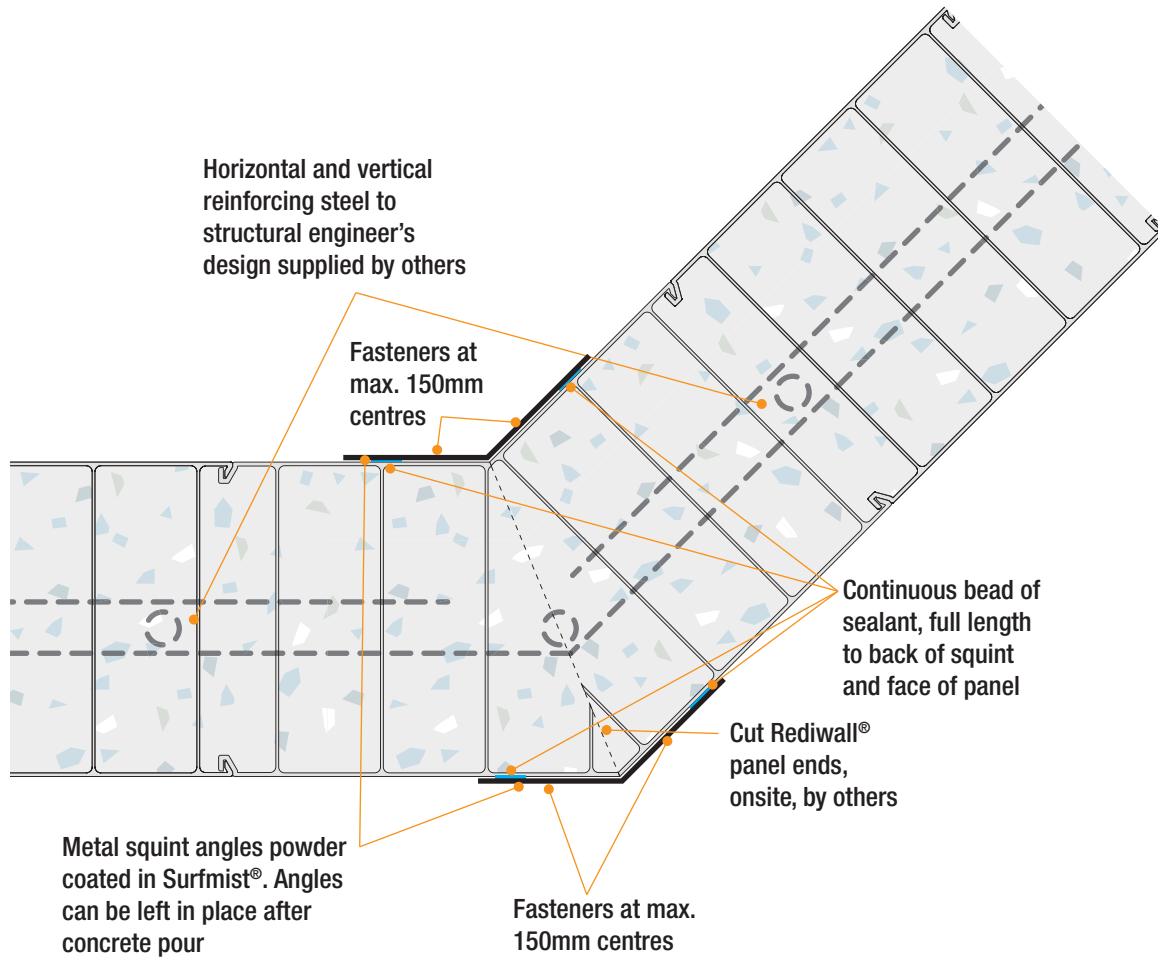

Notes:

- Refer to Volume 3 – Installation Guide for bracing details.


**Fig 14: Corners with Timber Formwork**

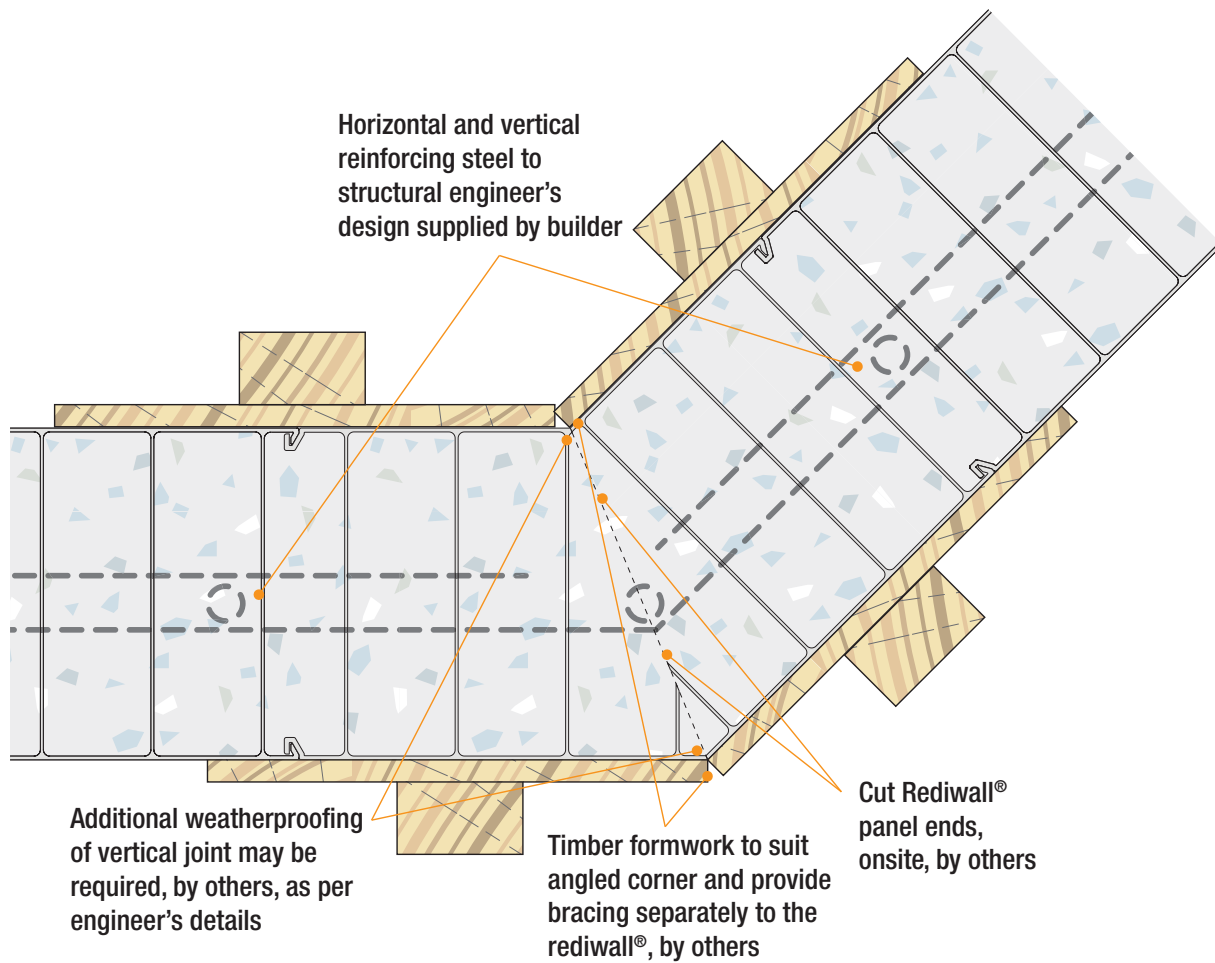

**Notes:**

- Refer to Volume 3 – Installation Guide for bracing details.


**Fig 15: Movement Joint – Vertical Junction**

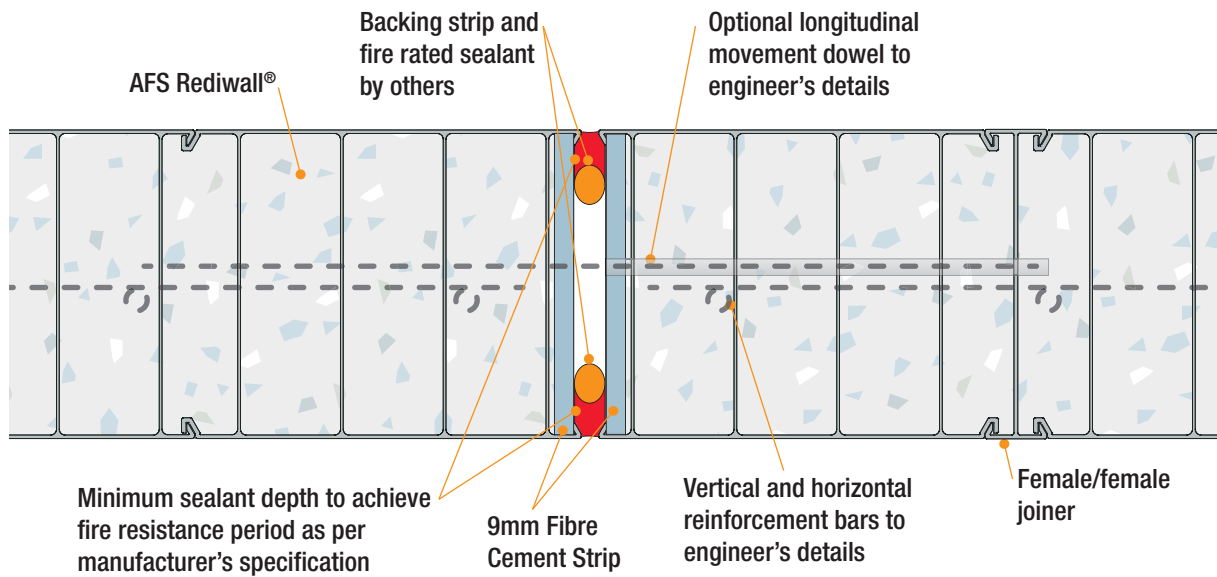

**Notes:**

- Can be dowel jointed if required structurally.
- Fire rating to be considered in project specifications.
- Refer to Volume 1 – Design, Performance & Compliance Guide, specific wall applications section to determine where this detail can be applied.


**Fig 16: Double Height Wall – Horizontal Joint (2 Stage Concrete Fill)**

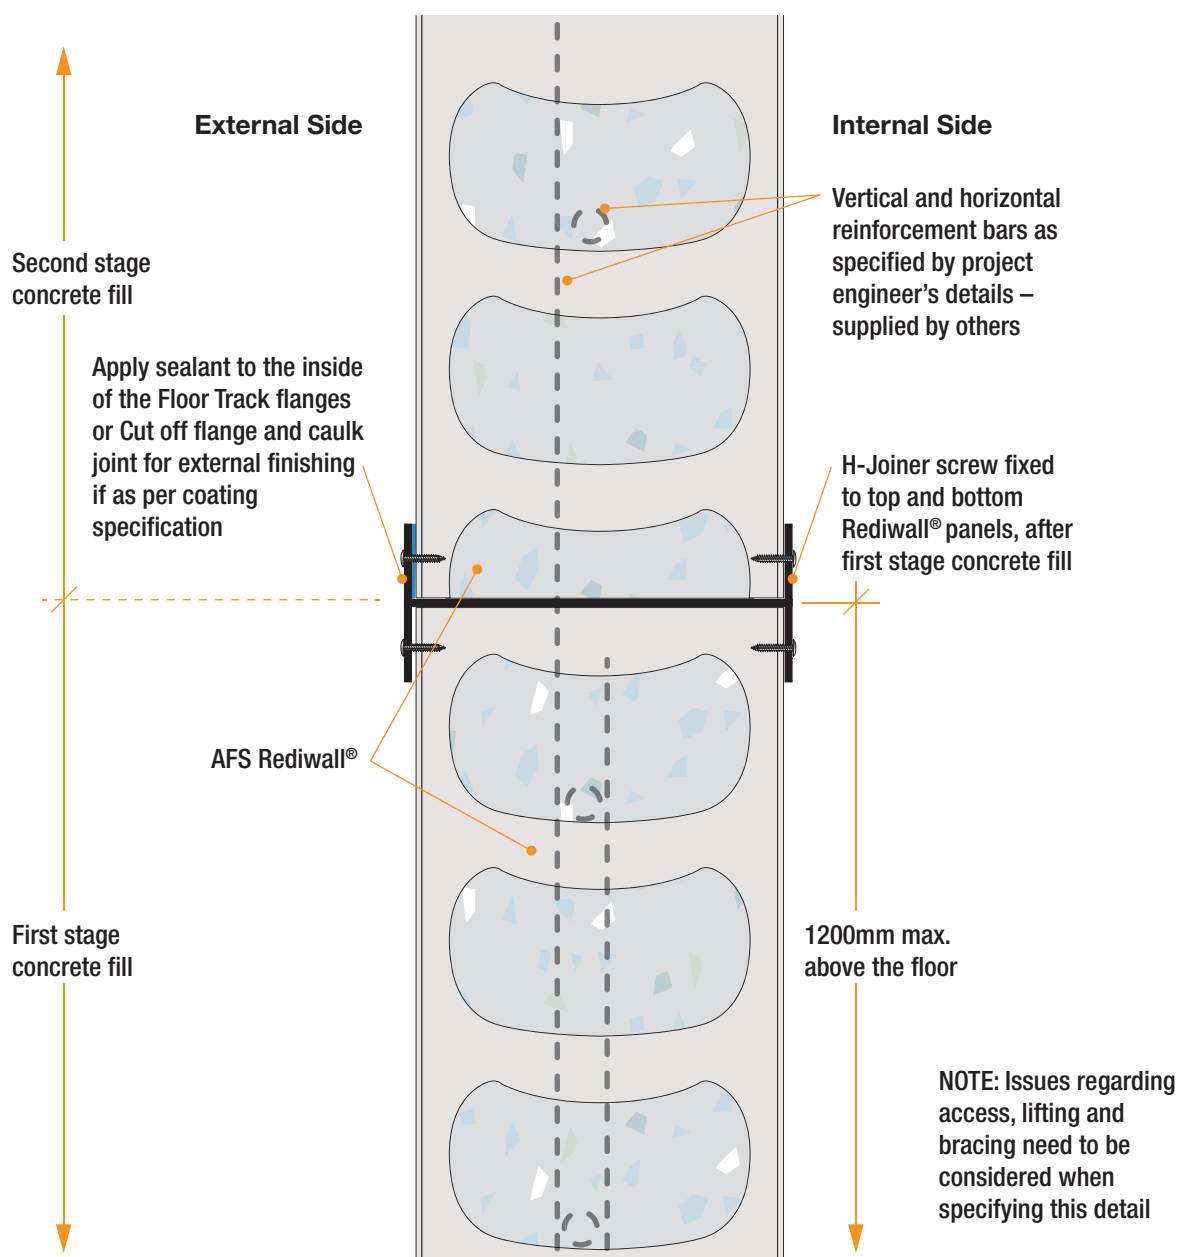

Notes:

- Install second stage upper panels, H-Joiner, reinforcement after first stage concrete fill has occurred.


**Fig 17: Junction of Rediwall® Party Wall and External Fire Rated Wall**

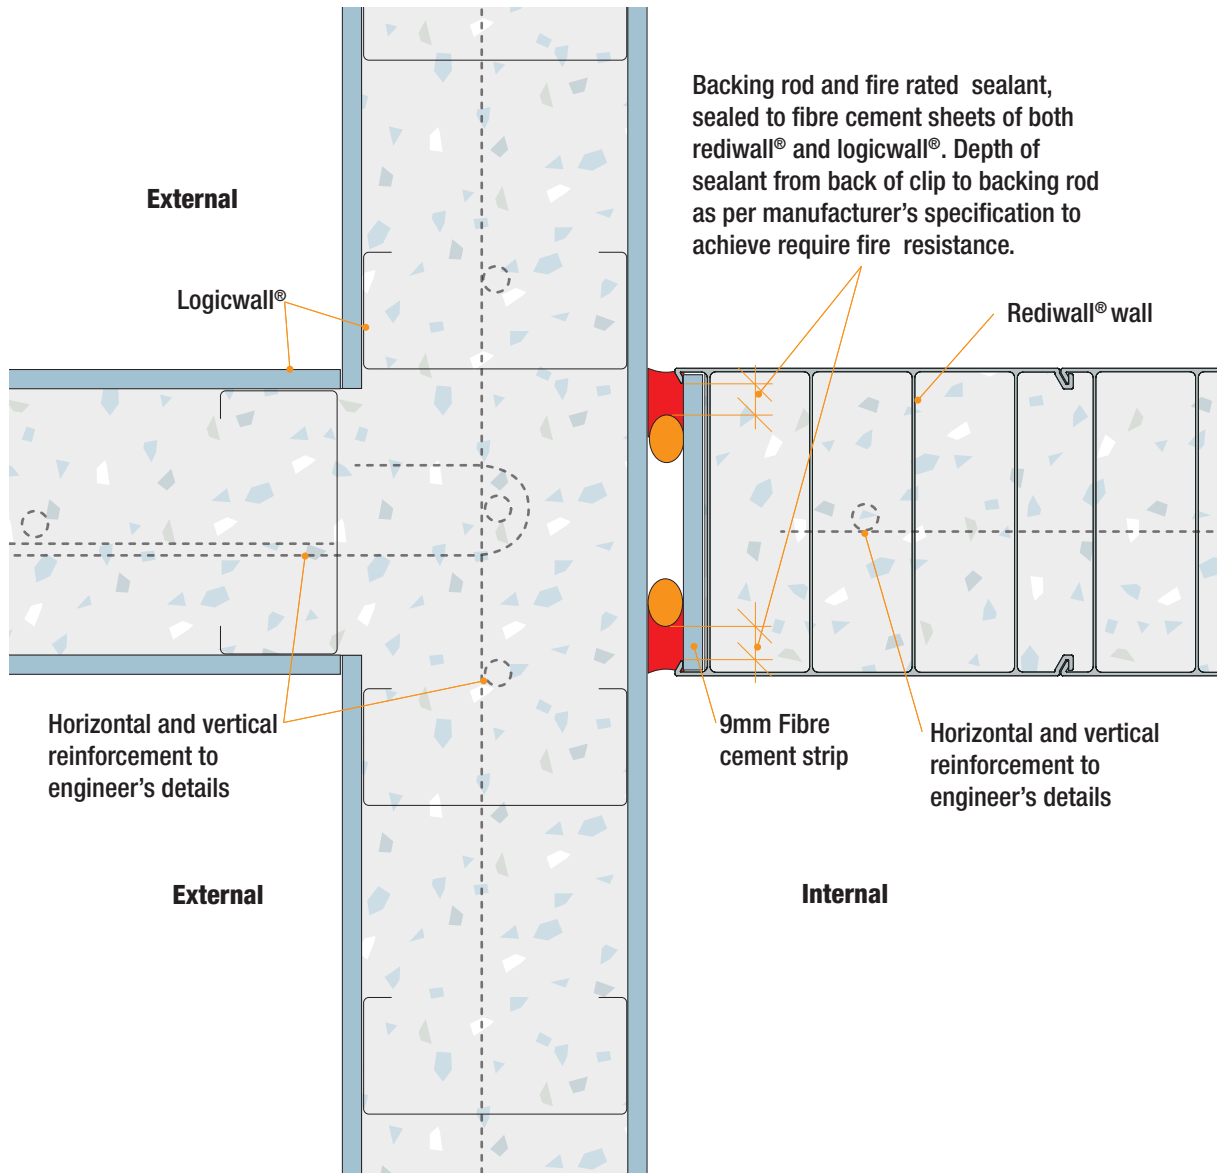

**NOTES:**

Refer to Volume 1 – Design, Performance & Compliance Guide, specific wall applications section to determine where this detail can be applied.

**Fig 18: Rediwall® T-Junction**

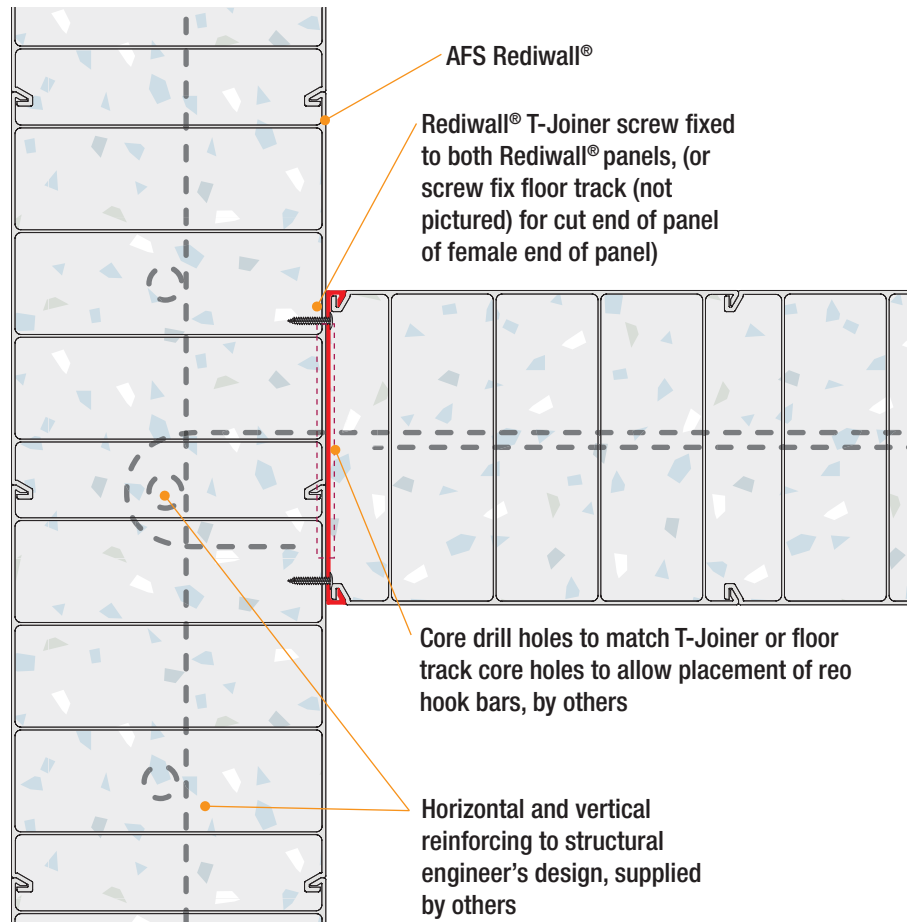

**NOTES:**

Refer to Volume 1 – Design, Performance & Compliance Guide, specific wall applications section to determine where this detail can be applied.


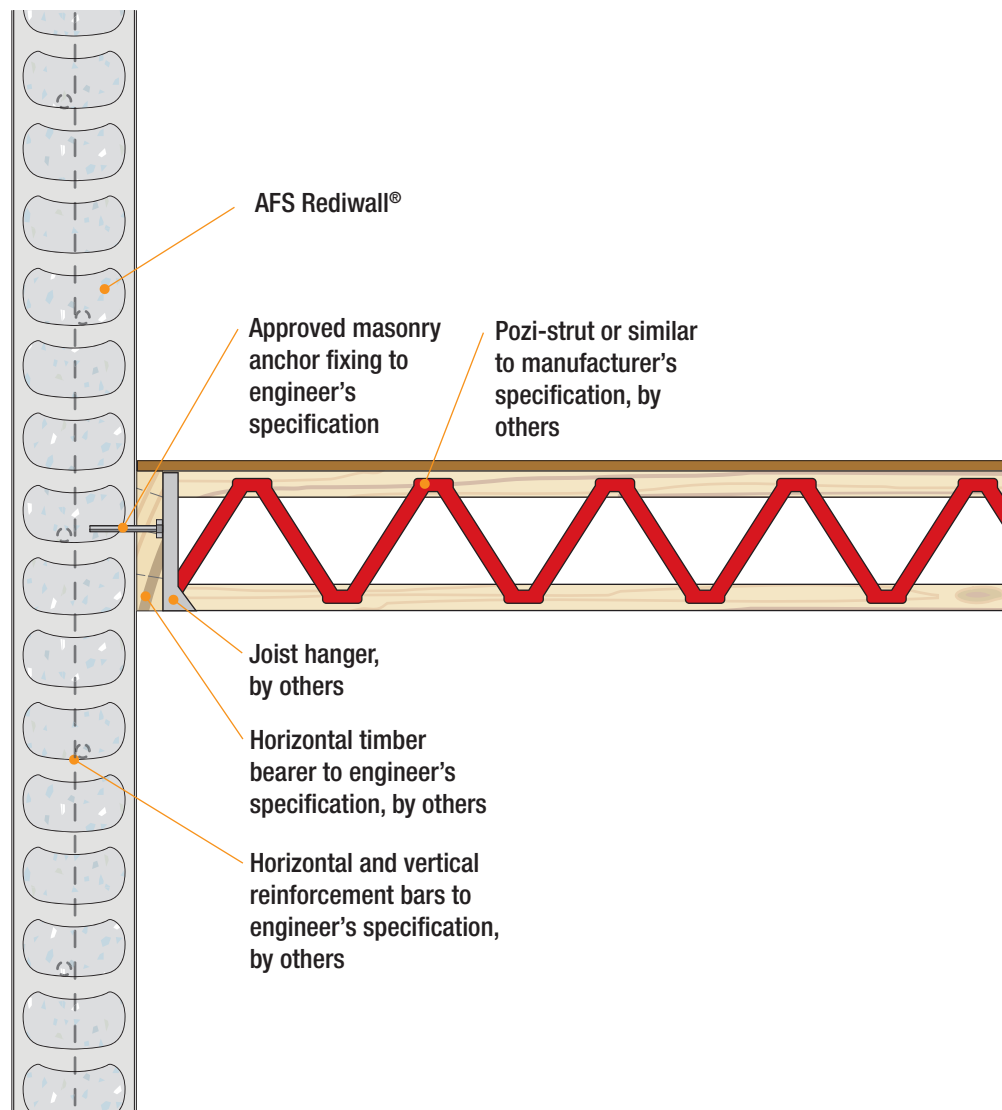
**Fig 19: Timber Floor Junction**


Fig 20: Timber Top Plate Connection

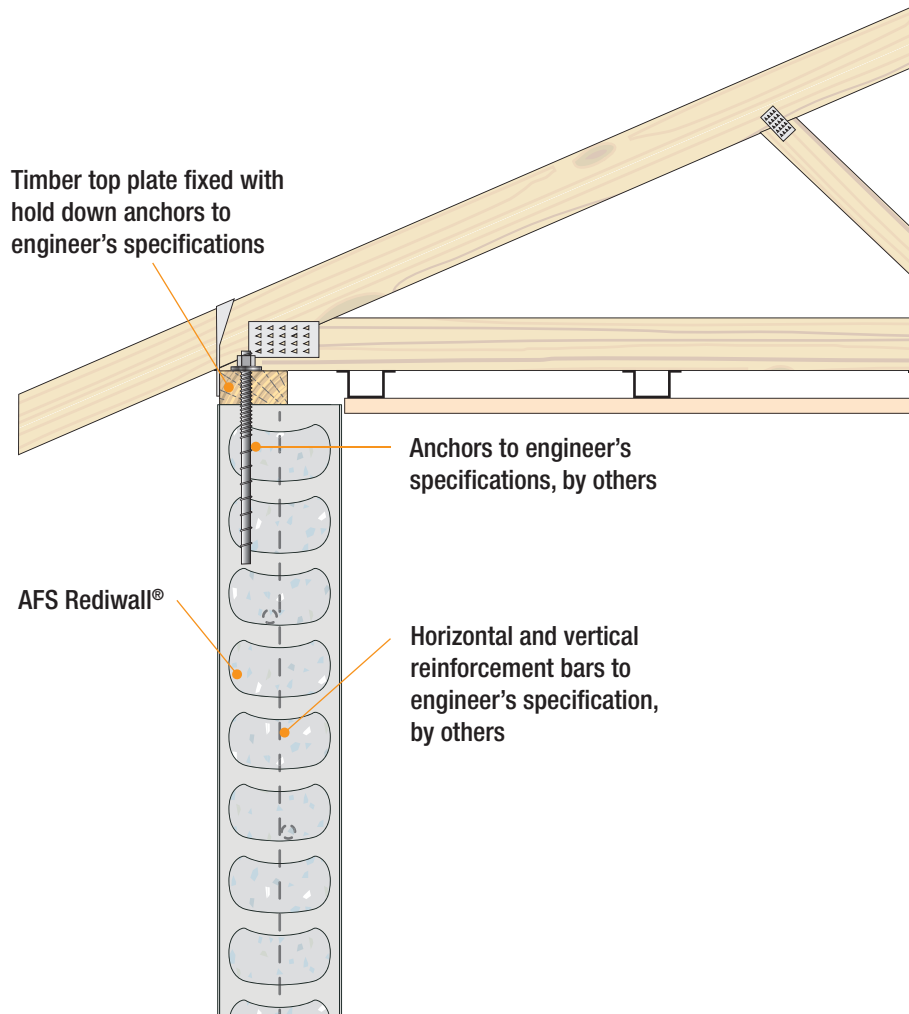


## Openings & Wall Terminations

Fig 21: Door Jamb Options

### Internal Fit – Door Jamb

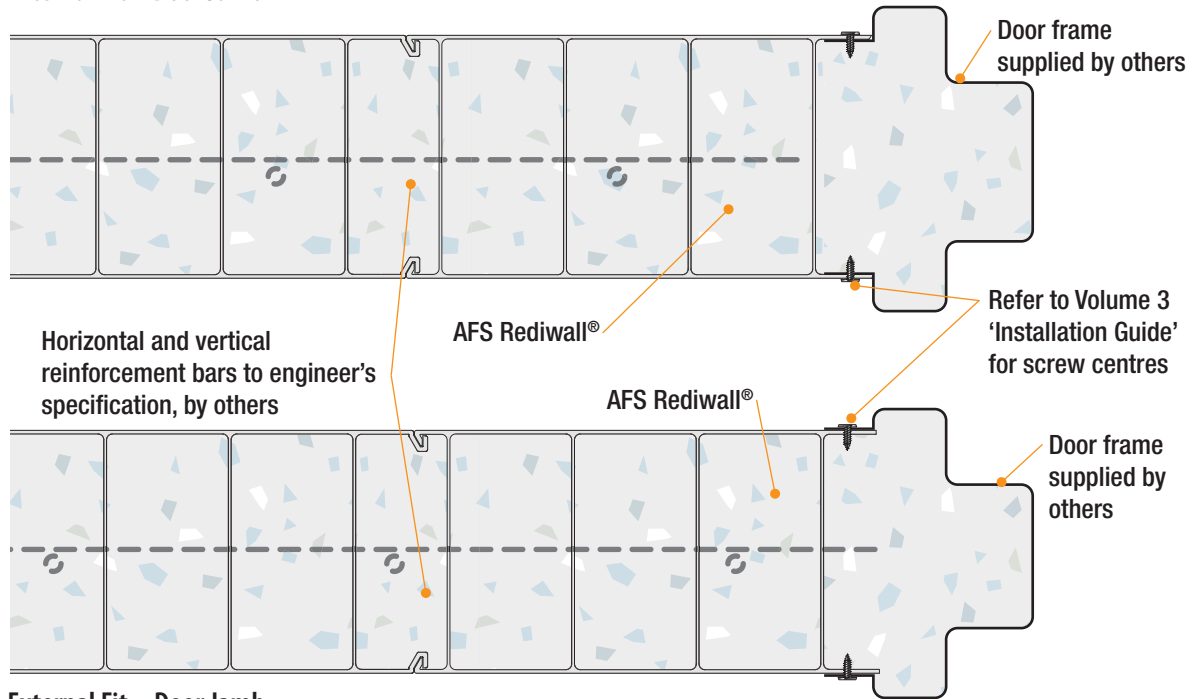

### External Fit – Door Jamb

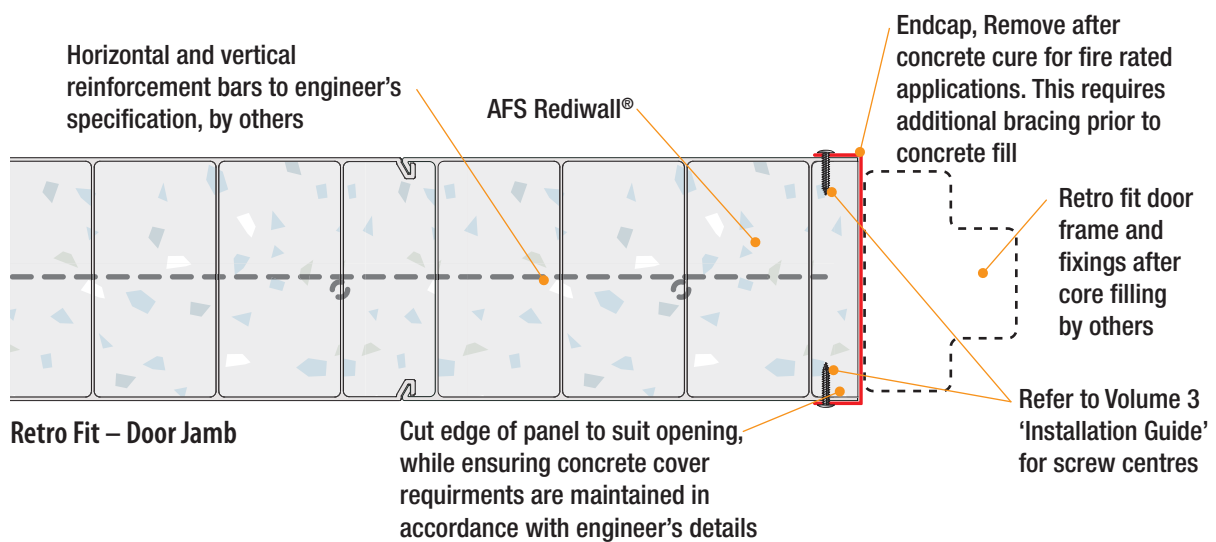


#### Notes:

Always refer to door frame supplier for specific details on installation arrangement of frame to wall to ensure installation complies with door frame supplier's certification.

Fig 22: End Cap Options




Fig 23: Typical Door Opening

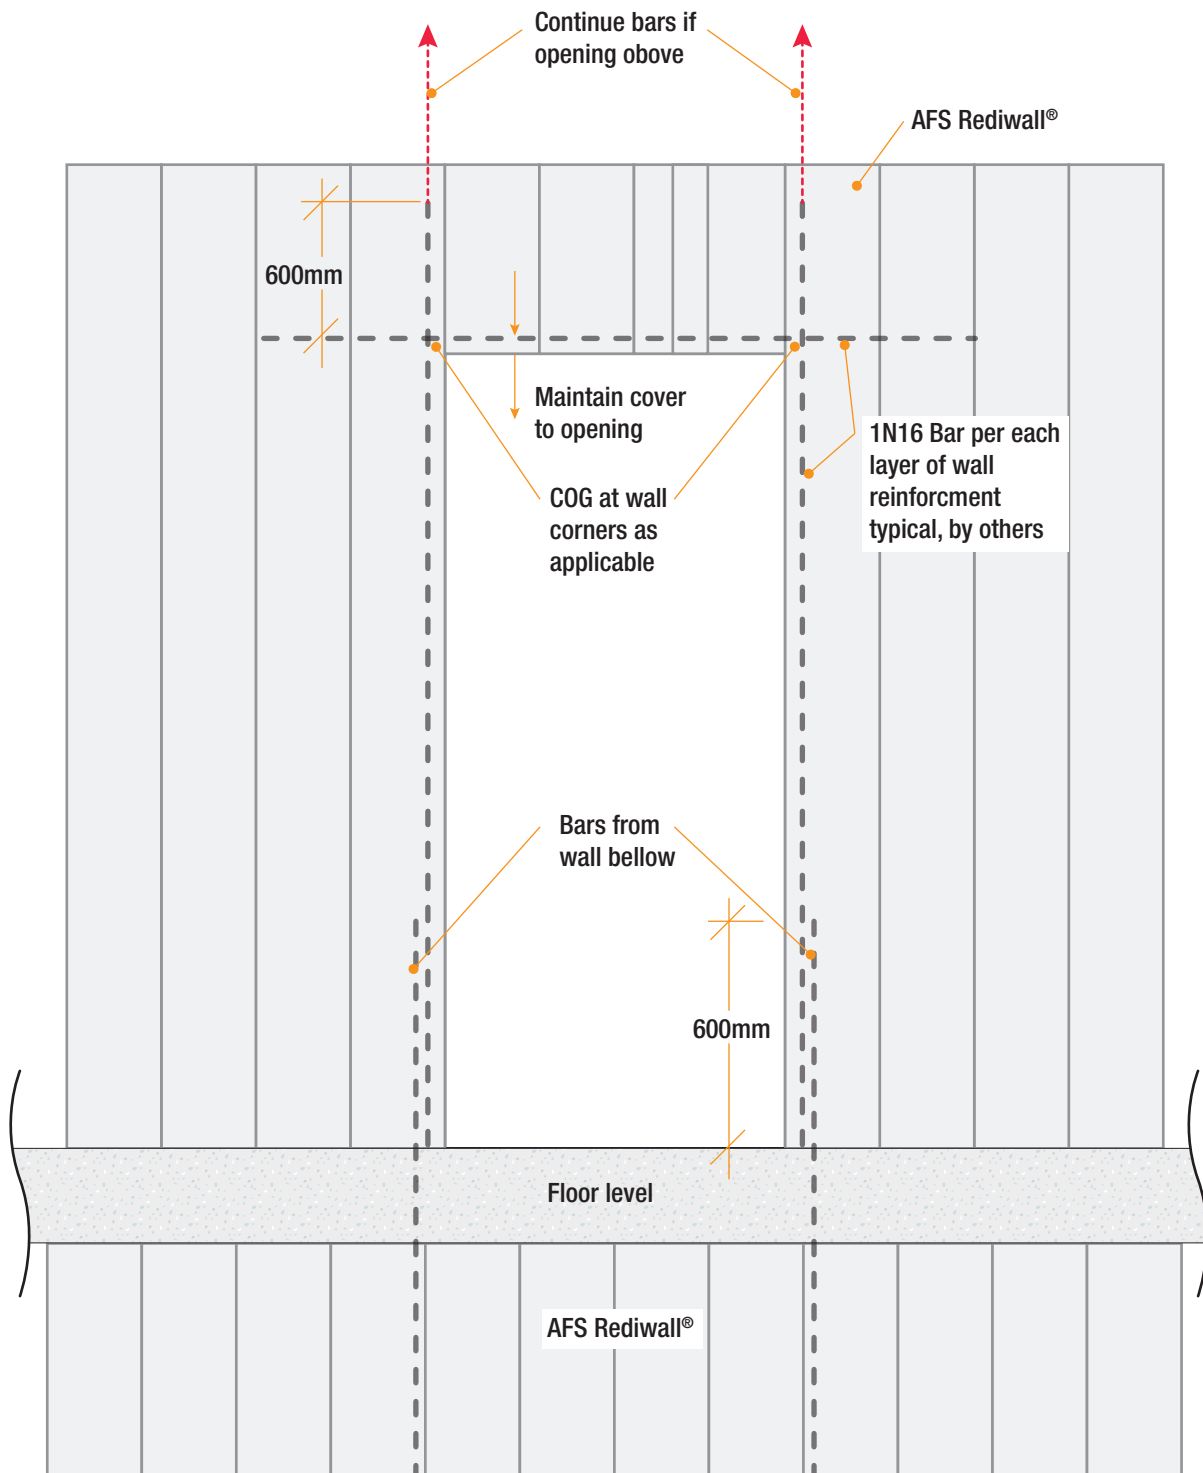

## Notes:

Always refer to engineer's details for specific reinforcement requirements for the door opening

Fig 24: Typical Wall Penetration

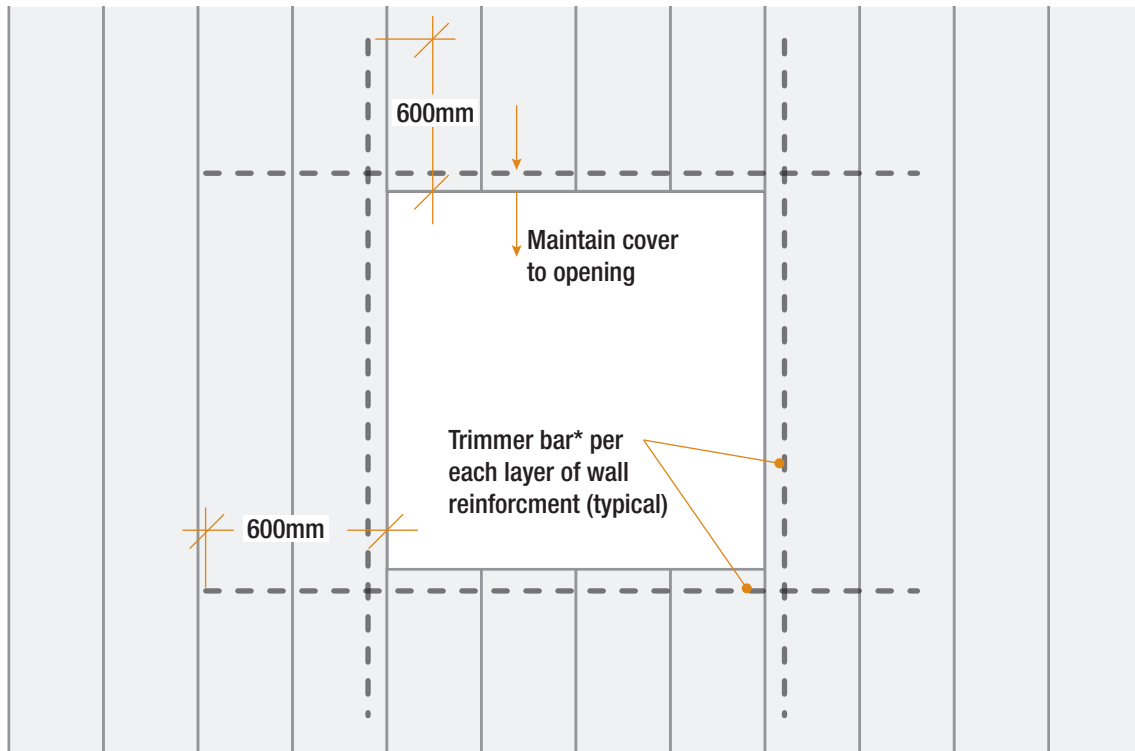

*Trimmer bars recommendations	
Wall penetration size (mm)	Recommended minimum trimmer bar size
250 – 600	1N12
601 – 1200	1N16

Alternatively refer to engineer's details.

Notes:

Always refer to engineer's details for specific reinforcement requirements for opening penetrations.

Fig 25: Typical Opening in Rediwall® - Side Elevation View



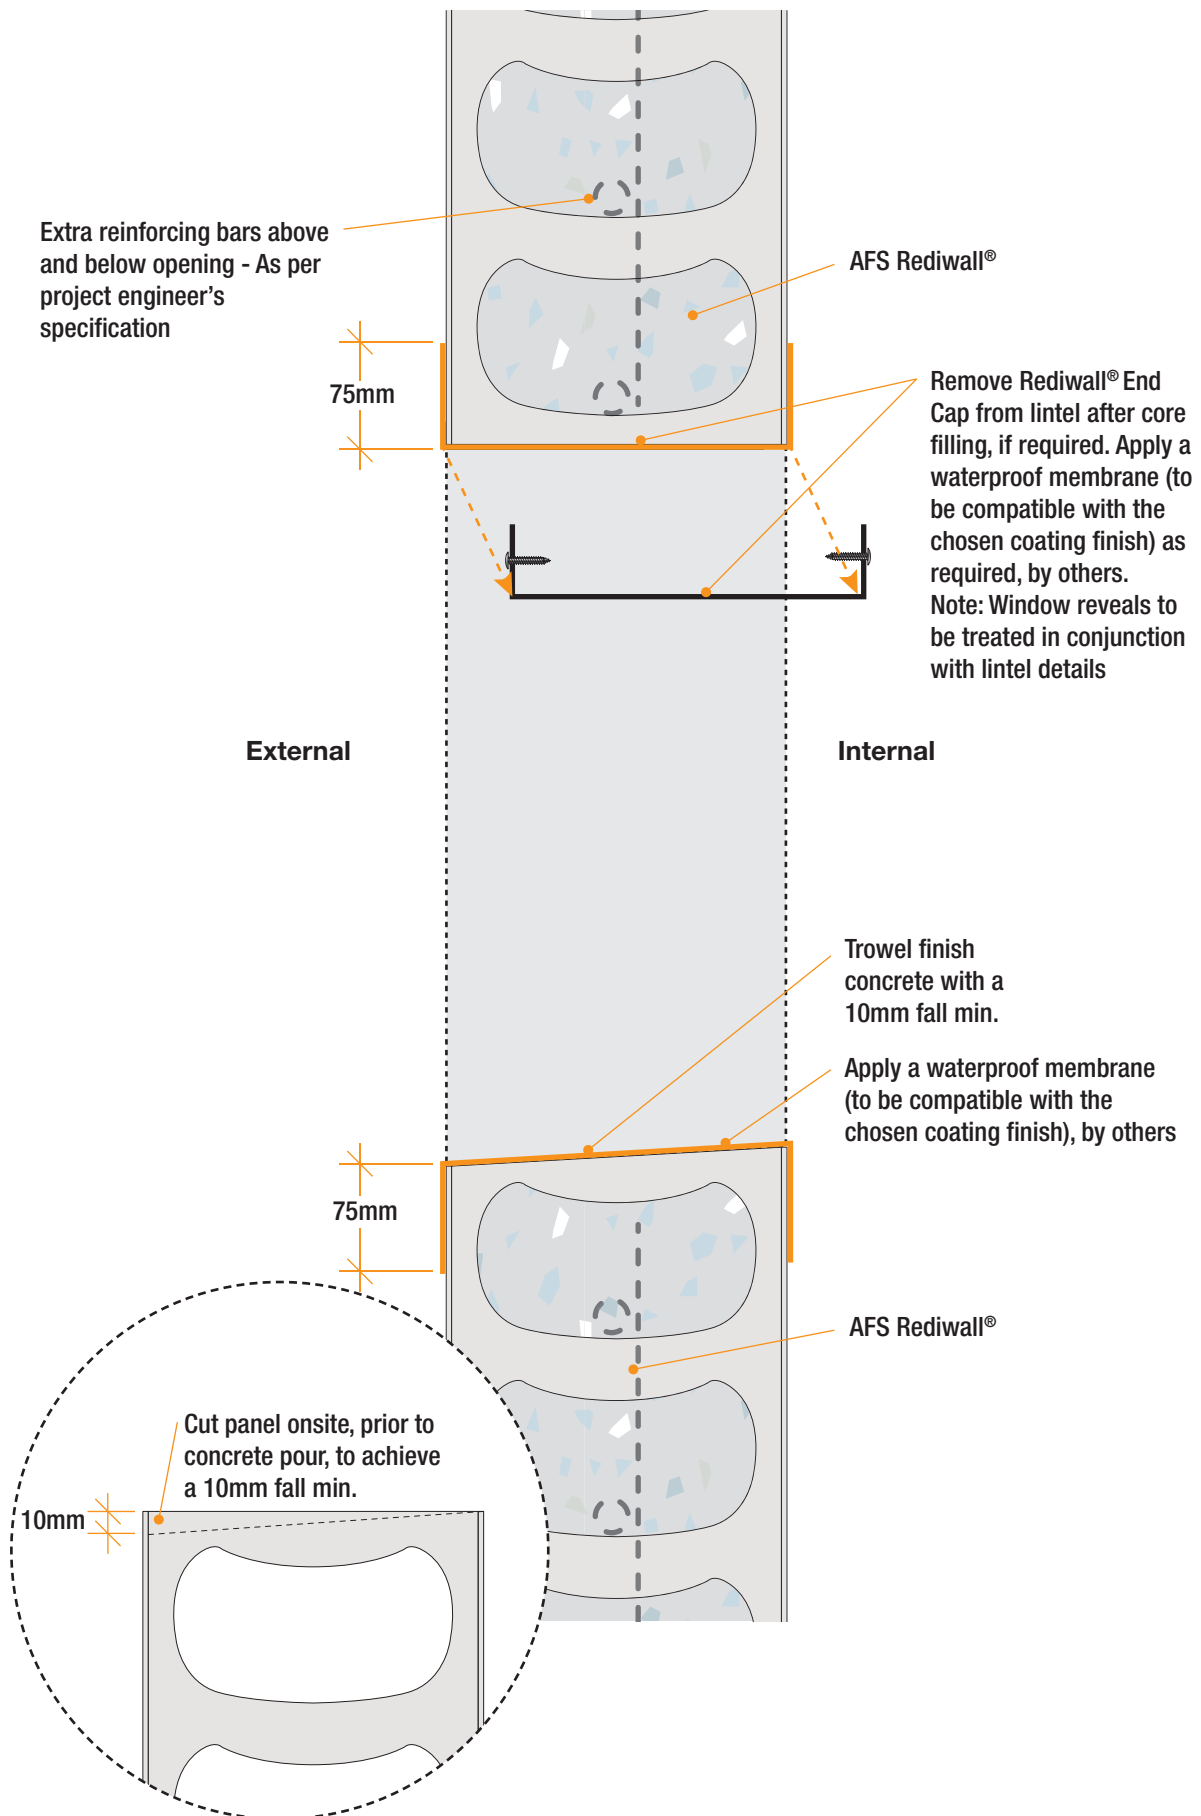


Fig 26: Window Opening - Side Elevation View

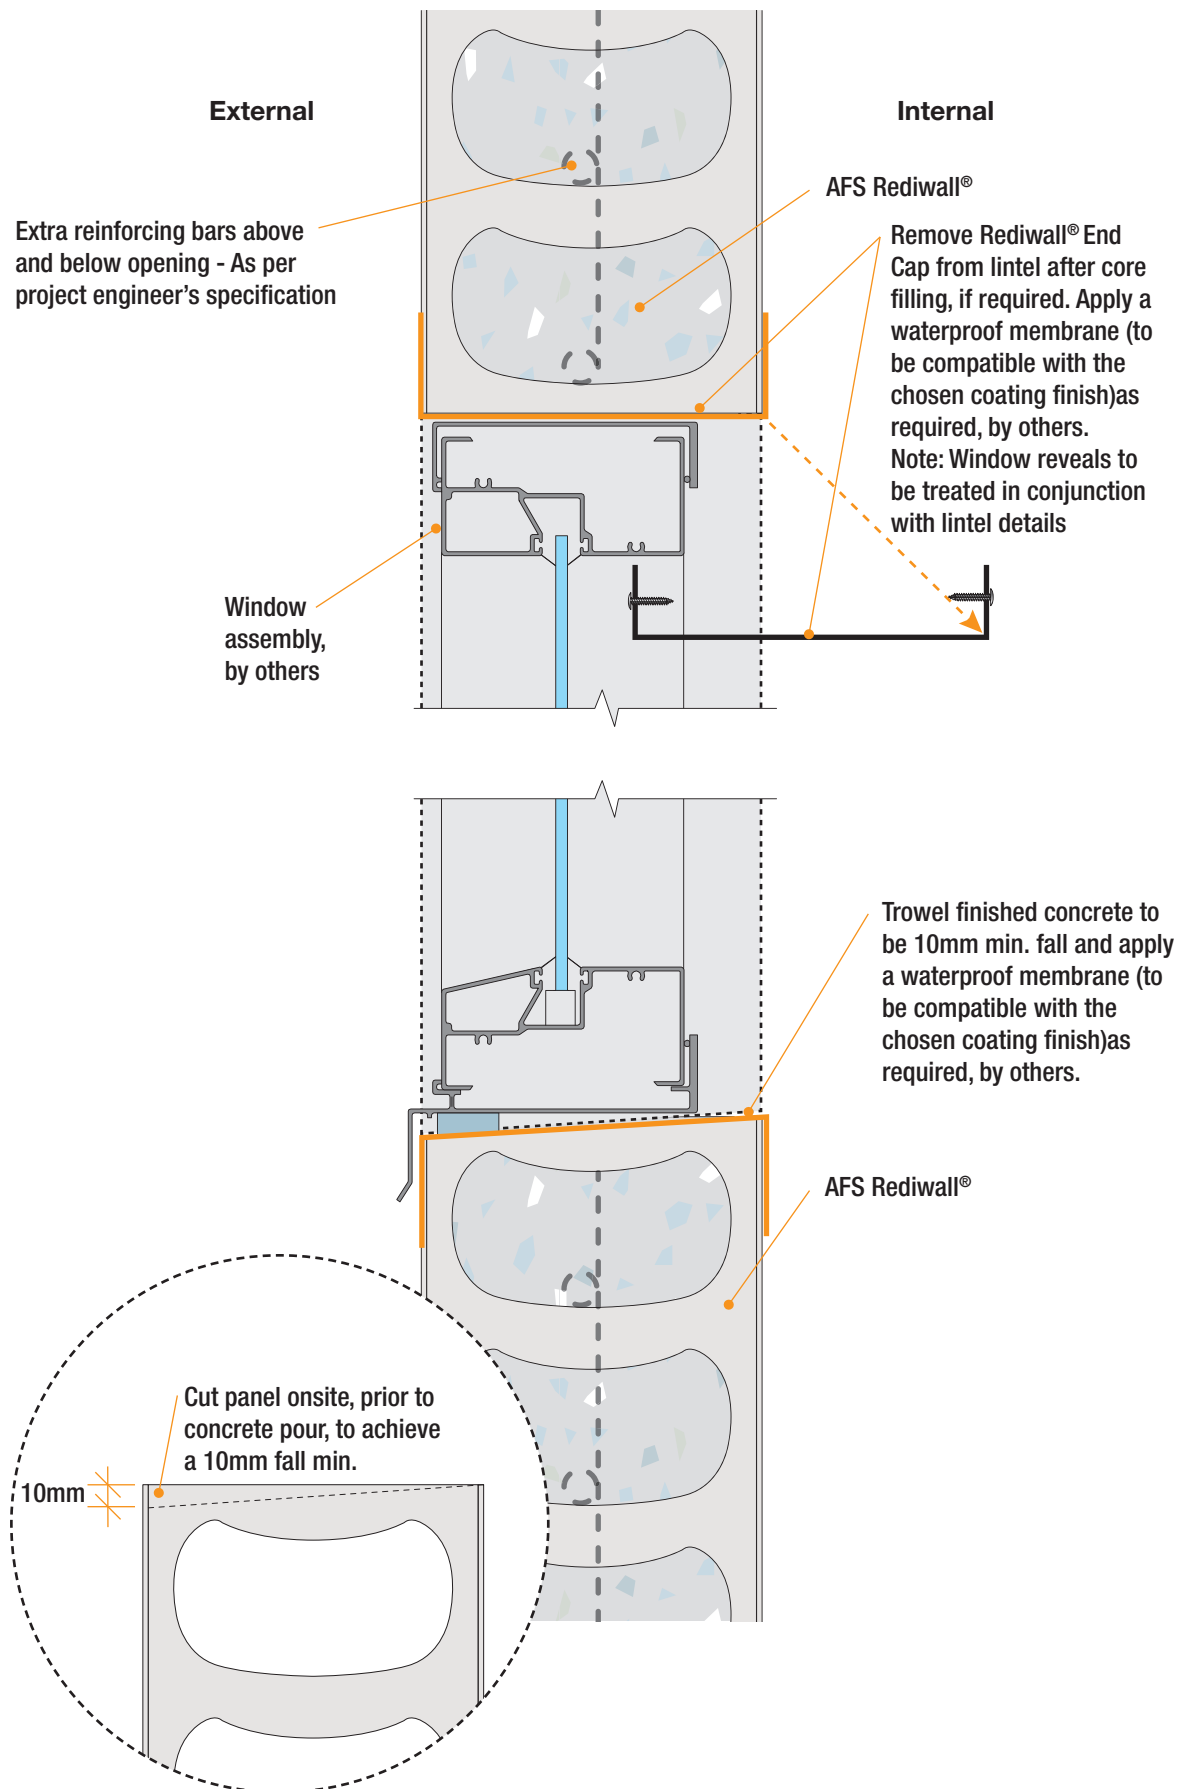

## Attachments & Services

Fig 27: Services

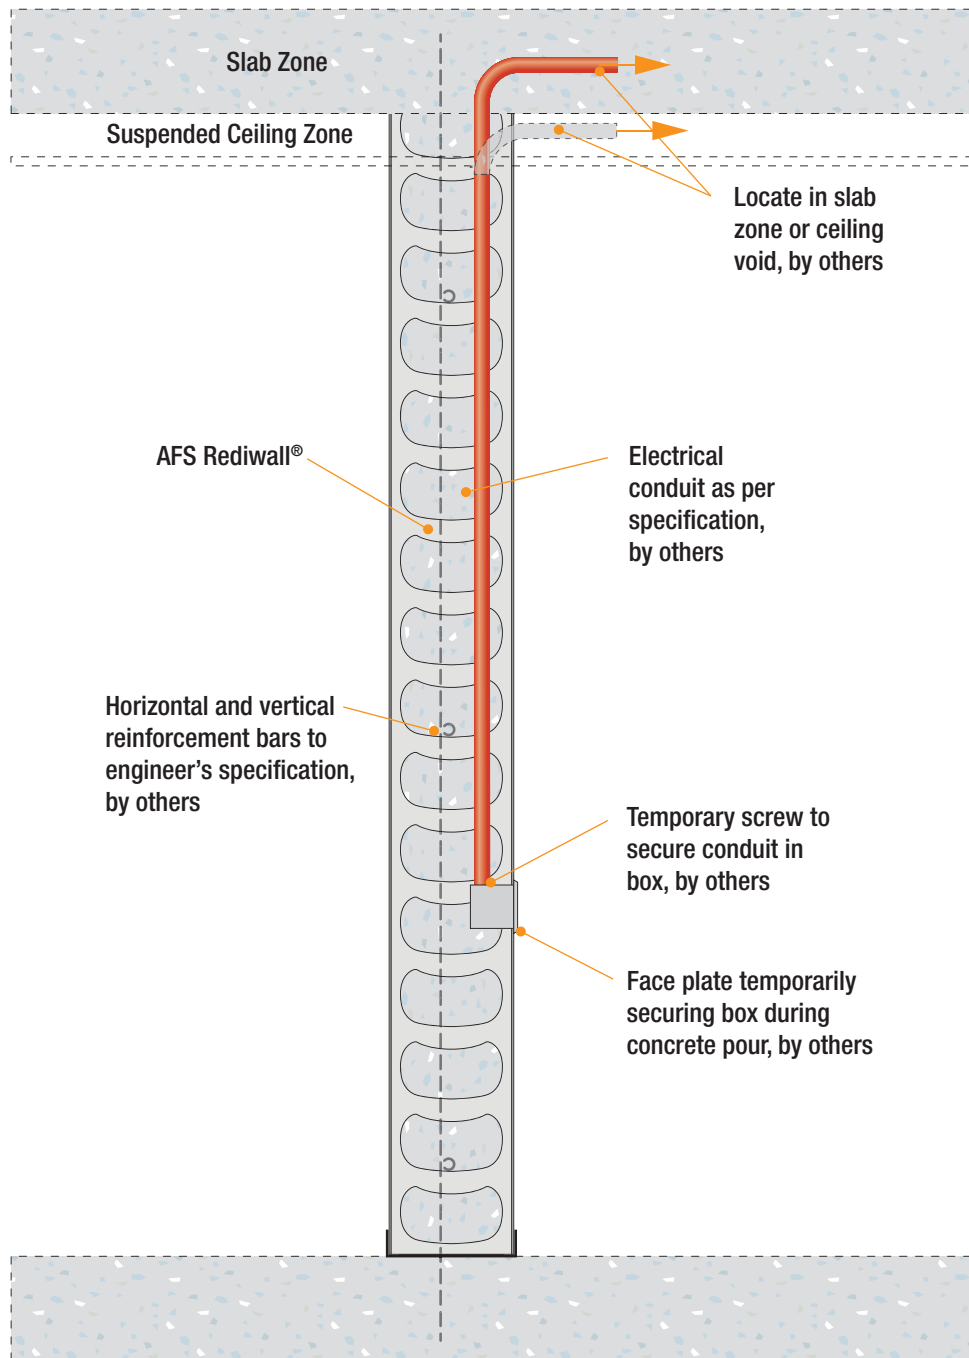

Notes:

- Only non pressure services to be installed inside rediwall®
- Consideration to be given to fire and acoustic design when installing service boxes.
- Refer to Volume 1 Guide for more information in regards to full service penetration details.

## Wall Systems

Fig 28: Typical Party Wall Detail (Continuous Construction)

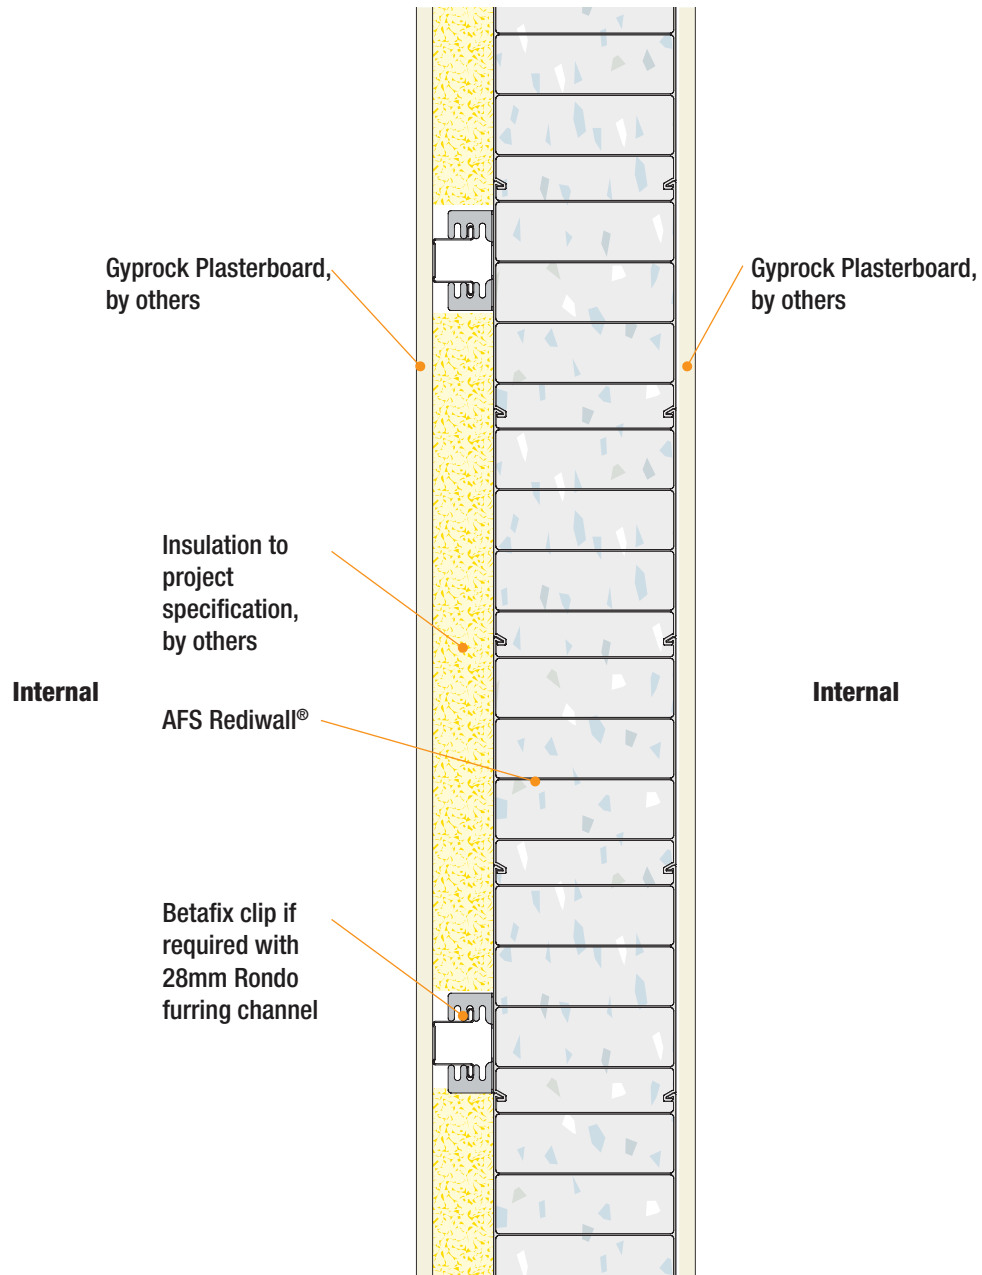
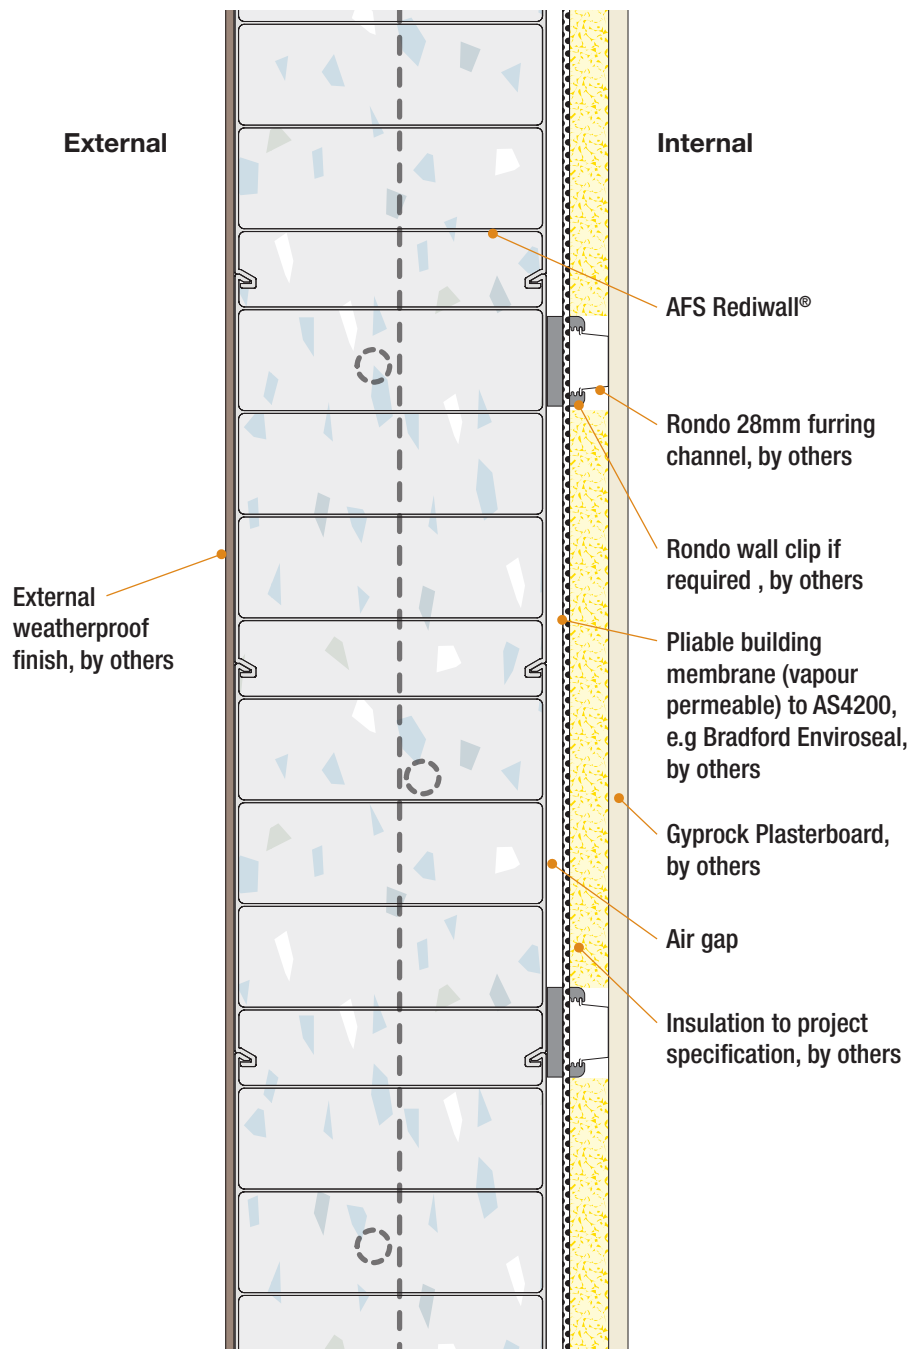


Fig 29: Typical Rediwall® External Wall with Internal Plasterboard Lining on Furring Channel (Continuous Construction)



**Fig 30: Typical Separating Wall (Discontinuous Construction)**

Wet Area/Living Area or Wet to Wet Area (where Plumbing Services are to be installed to one side only)

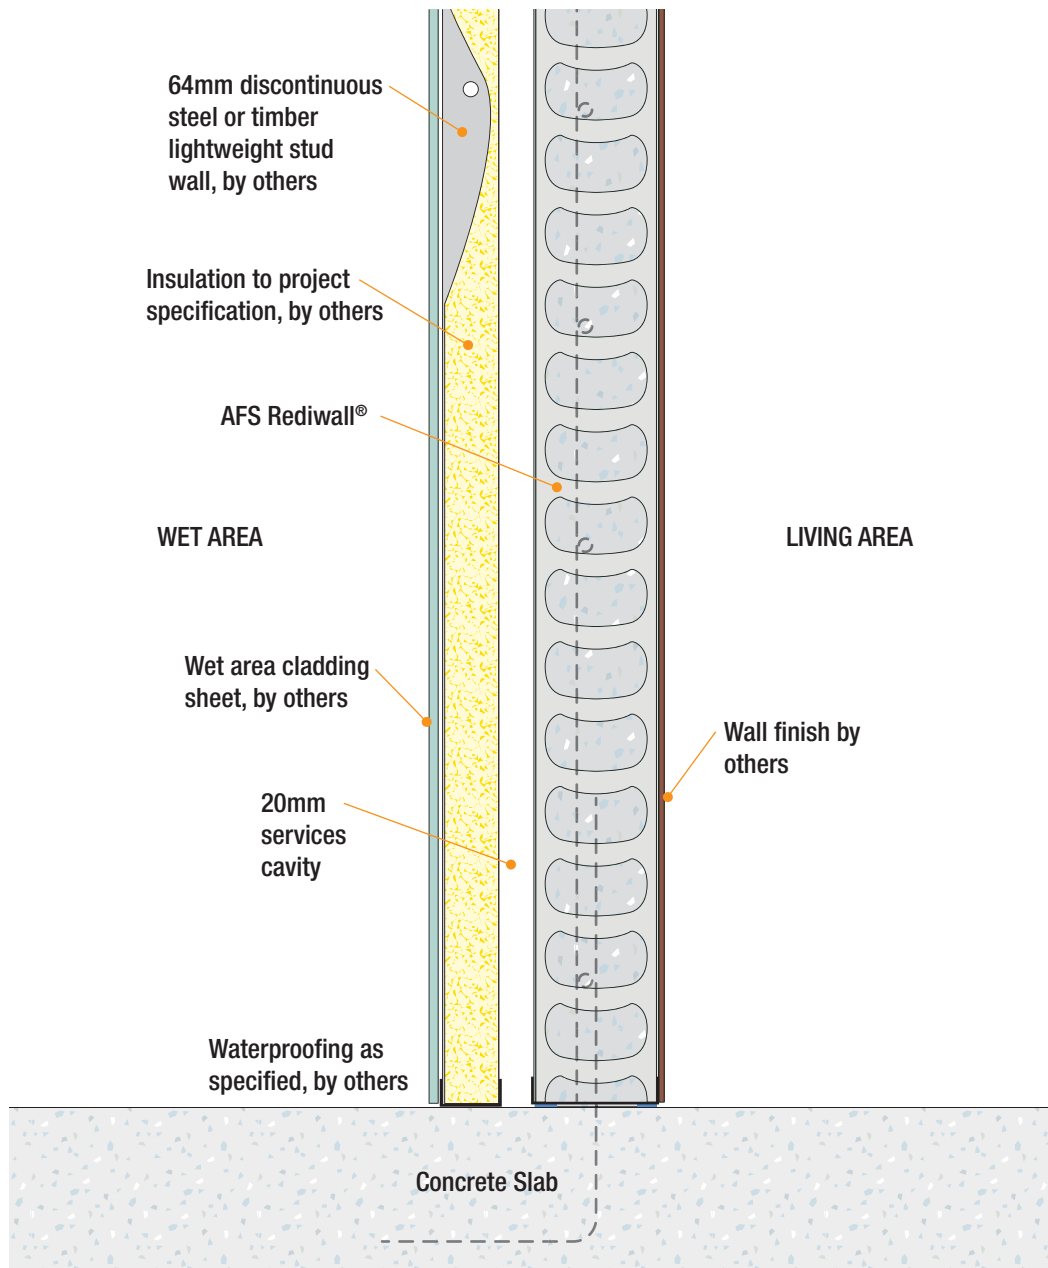


Fig 31: Rediwall® Boundary Wall Capping (Elevation View)


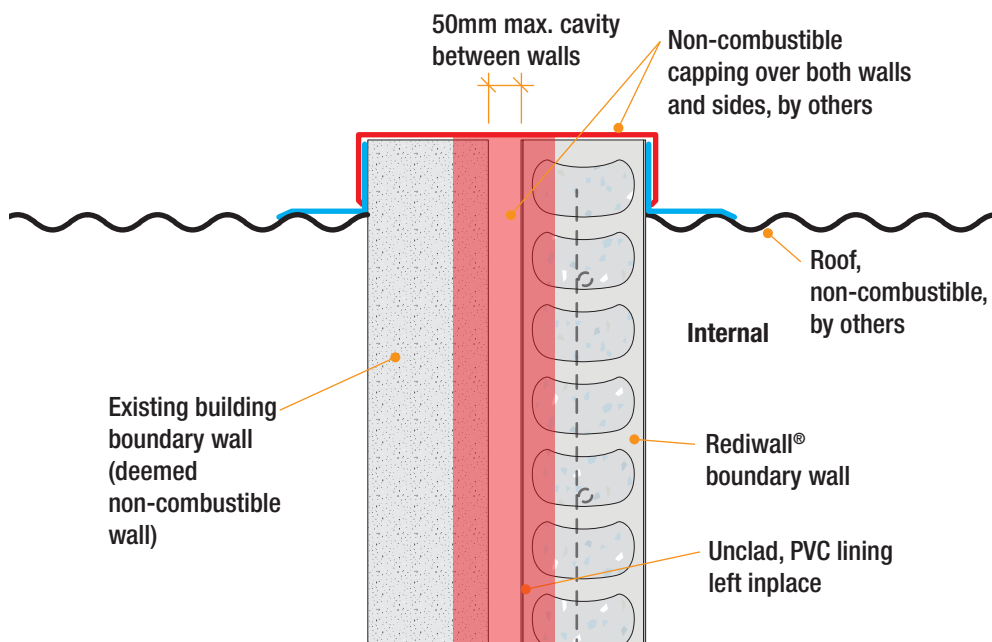


Fig 32: Rediwall® Boundary with Different Wall Heights

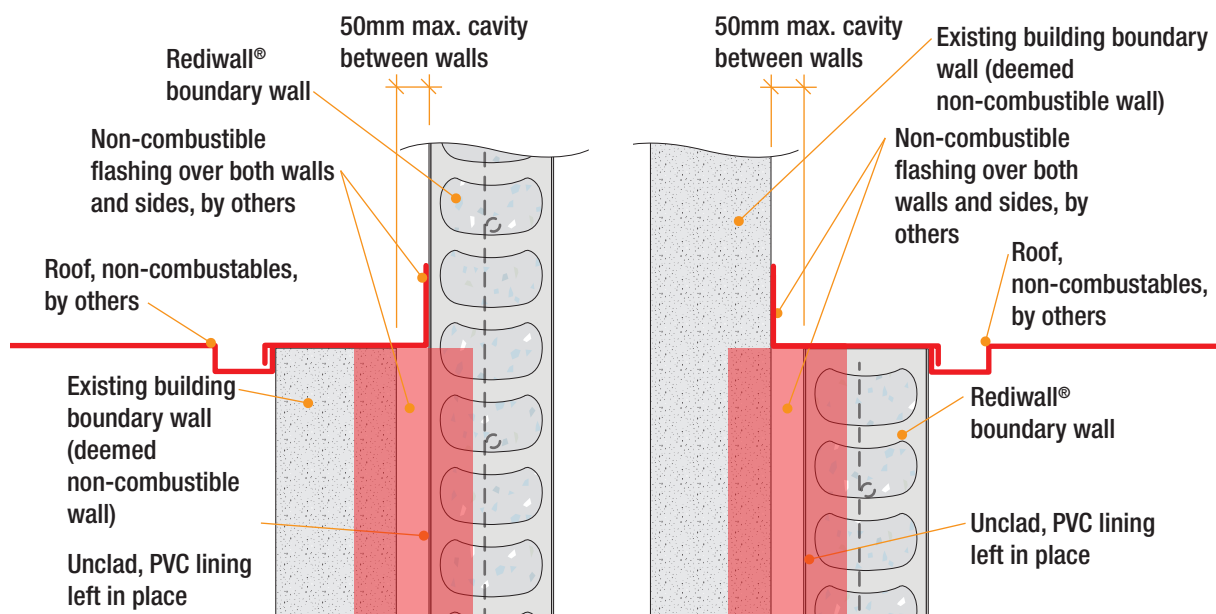

## NOTES:

Refer to Volume 1 – Design, Performance & Compliance Guide, specific wall applications section to determine where this detail can be applied.

# Rediwall® Finishing Treatments

## Introduction

The use of PVC in rediwall® permanent formwork provides a durable, attractive and water resistant surface for concrete walls. AFS rediwall® can be finished in a number of treatments for internal and external wall applications that enhance the overall wall system's:

- Acoustic, fire and non-combustibility performance,
- Architectural surface, and
- Weather resistance with external walls.

For best results these should be considered in the planning stages of the project and be clearly set out in the specifications.


## Rediwall® Non-Combustible Compliant Finishing Treatments

Rediwall® can use a variety of finishing treatments, these have been assessed by Stephen Grubits and Associates, Fire Safety Engineers for their suitability to meet non-combustibility requirements of the NCC. The various finishing treatments are shown in the following diagrams.

Reference should be made to TABLE A7 & TABLE A8 – Volume 1, to determine where the finishing treatments can be used, and any particular requirements that have been identified for each finish and application.

**Fig 33: Unclad Rediwall® With PVC Lining Left In Place – Finish Type (a)**

**Finish Type (a)**

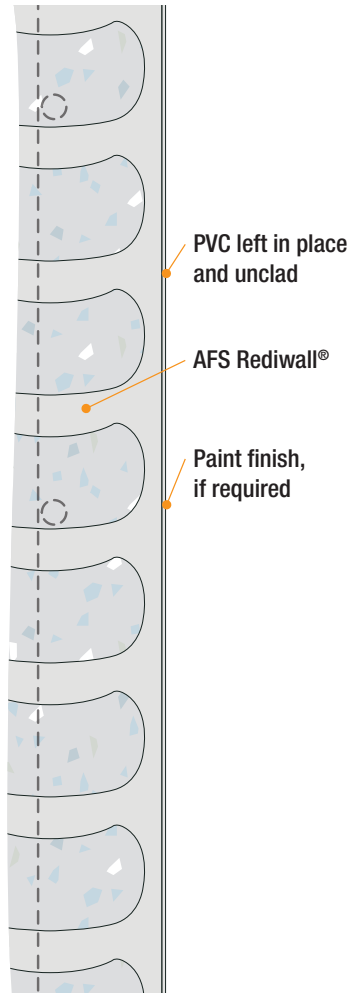


**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.

– Ensure paint coating complies to requirements of the NCC.


**Fig 34: Non-Combustible Cement Render (or Similar Finish) Over Rediwall® PVC Lining – Finish Type (b)**

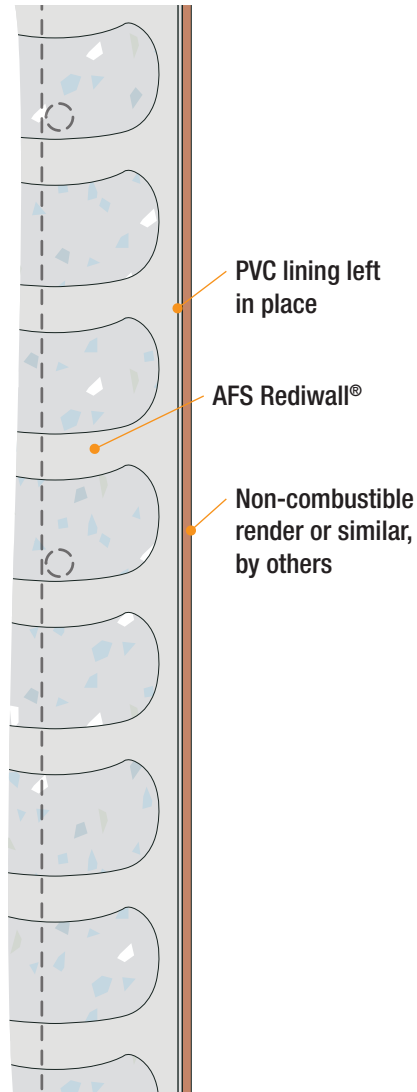

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 35: Plasterboard Direct Fixed To Rediwall® – Finish Type (c)**

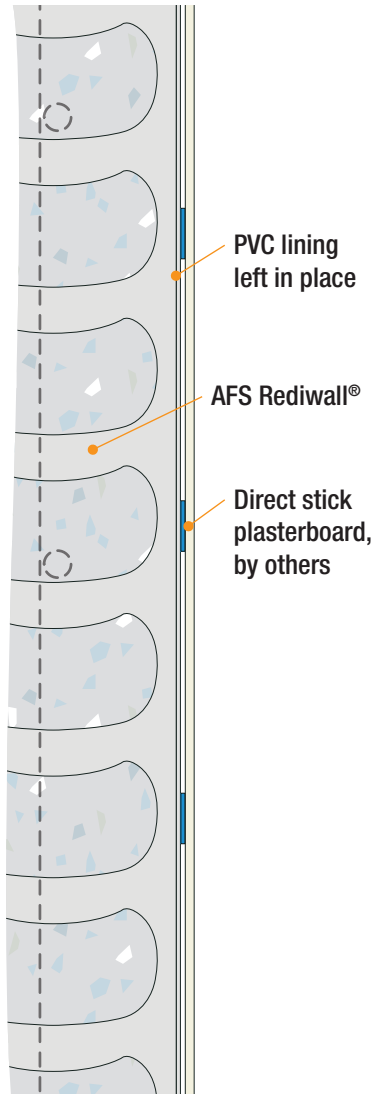

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 36: Plasterboard Lining and Horizontal Steel Furring Channels Fixed To Rediwall® – Finish Type (d)**

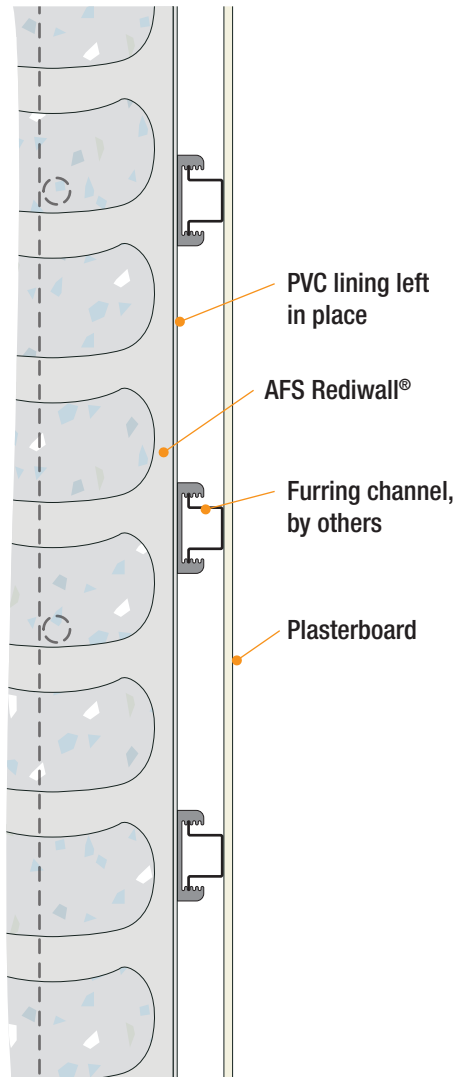

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 37: Rediwall® With Face Brick Exterior Skin – Finish Type (e)**

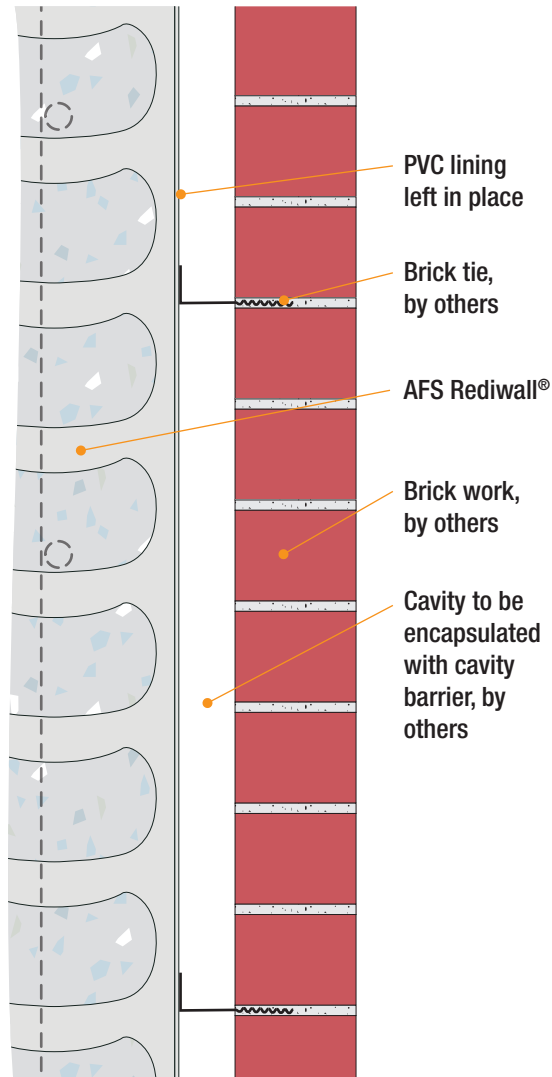

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 38: Tile System (<32kg/m<sup>2</sup>) Mechanically Fixed To Rediwall® – Finish Type (f)**

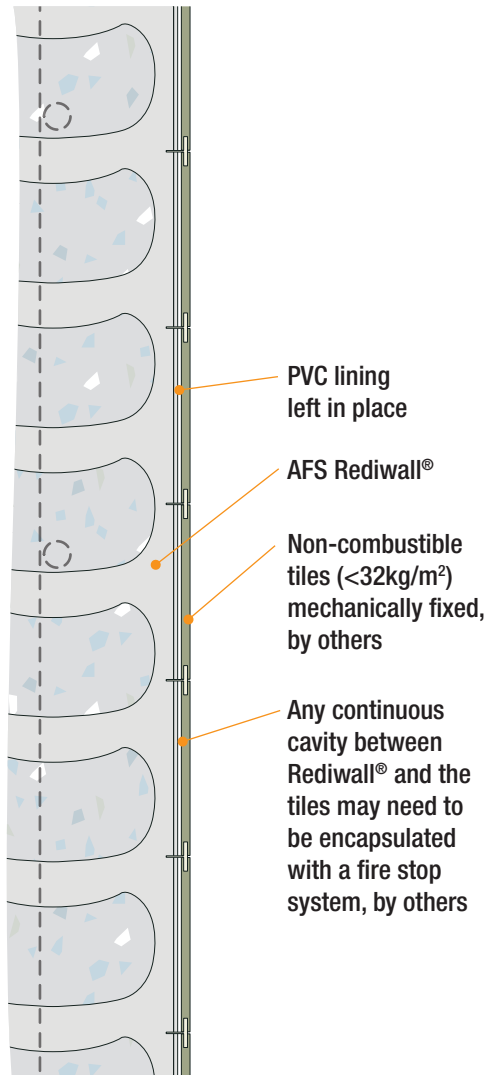

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 39: Mechanically Fixed Non-Combustible Cladding To Rediwall® – Finish Type (g)**

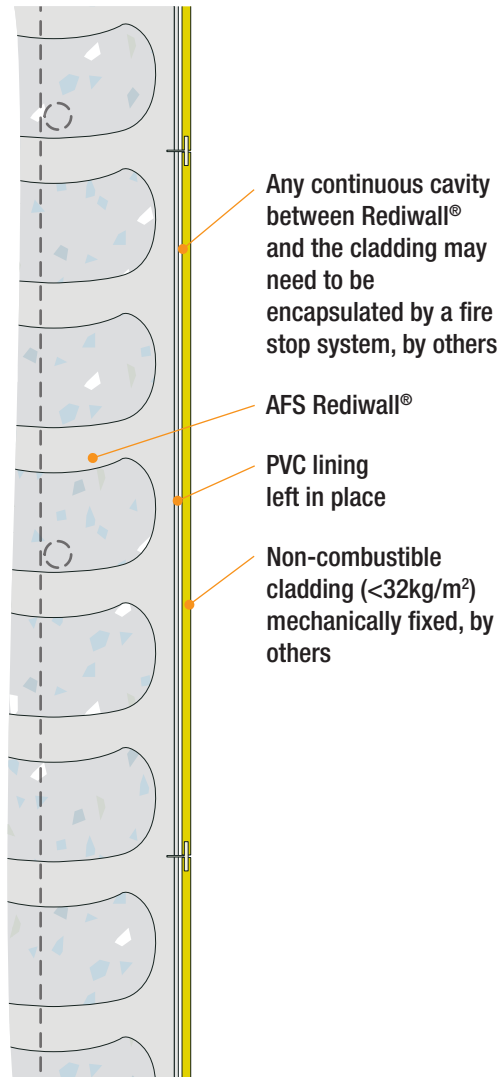

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.


**Fig 40: Tile System (<32kg/m<sup>2</sup>) Adhesive Fixed To Rediwall® – Finish Type (i)**

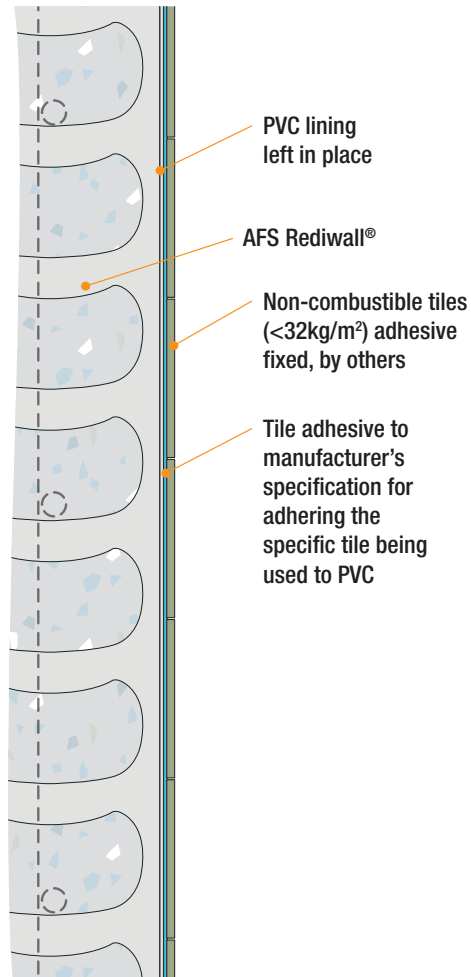

**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.

**Fig 41: Adhesive Fixed Non-Combustible Cladding To Unclad Rediwall® – Finish Type (h)**

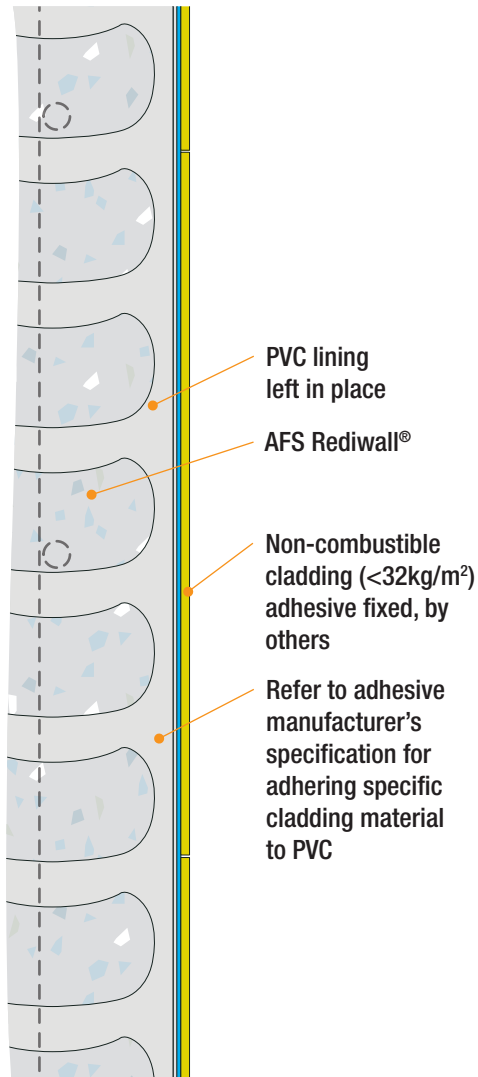


**NOTES:**

Refer to Volume 1 – "TABLE A7: Summary of compliance with Performance Requirements & Essential Safety Precautions" to determine where this finish can be used.

NOTES:

A large rectangular area filled with a grid of small, evenly spaced dotted lines, intended for handwritten notes.

NOTES:

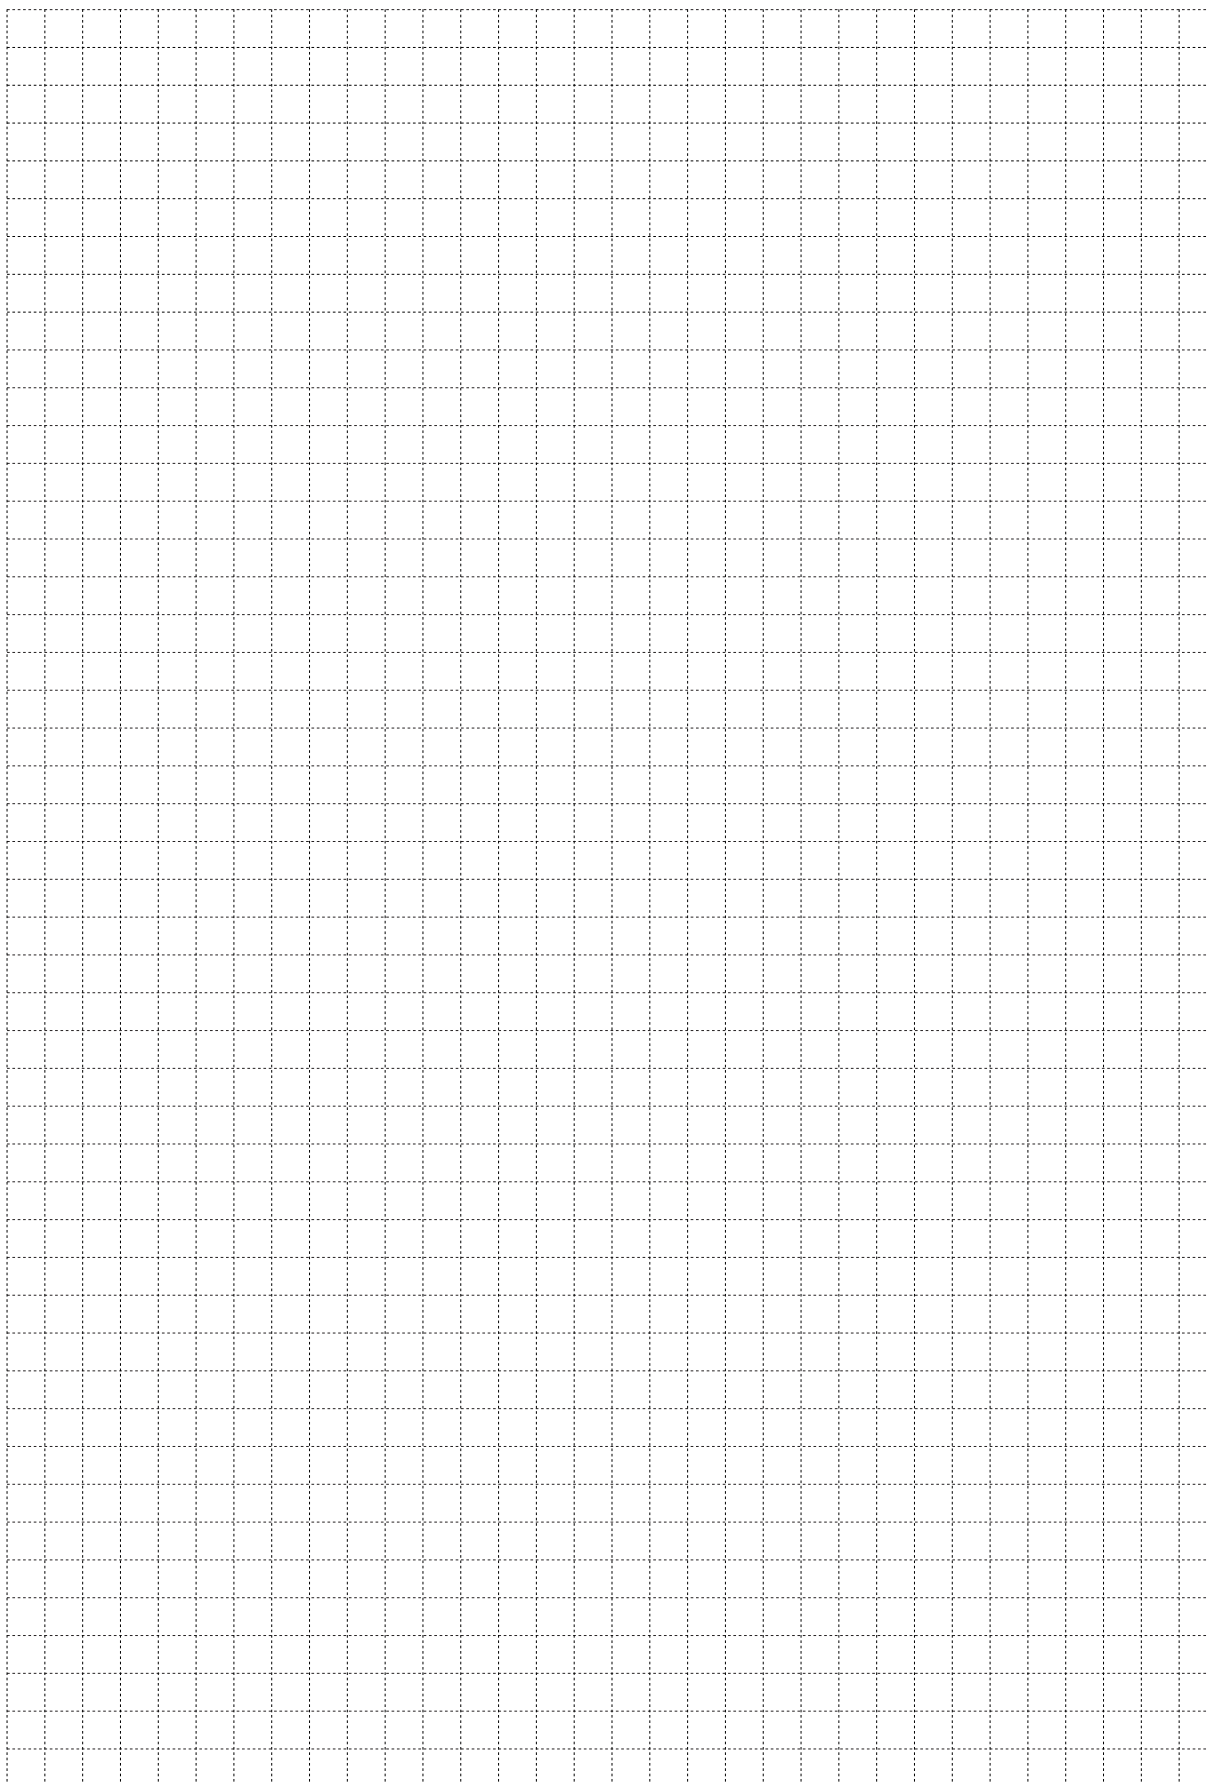A large rectangular area filled with a grid of small, evenly spaced dotted lines, intended for handwritten notes.

NOTES:

A large rectangular area filled with a grid of small, evenly spaced dotted lines, intended for handwritten notes.

PVC-based permanent formwork for basements, columns, blade  
& party walls, lift & stair cores, retaining walls and retention tanks



**Disclaimer:** Information presented in this document is supplied in good faith and to the best of our knowledge was accurate at the time of preparation. The provision of this information should not be construed as a recommendation to use any of our products in violation of any patent rights or in breach of any statute or regulation. Users are advised to make their own determination as to the suitability of this

information in relation to their particular purpose or specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by AFS or CSR, or its staff for any loss or damage caused by any person acting or refraining from action as a result of misuse of this information.

(C) 2021 AFS Systems Pty Ltd ABN 455 760 727 88  
BMS1827 0321 – MAR21



**[afsformwork.com.au](https://afsformwork.com.au) • 1300 727 237**

AFS Systems Pty Ltd • 110 Airds Road, Minto NSW 2566

